


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by GS I PTY 903
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 144 m
 Average Shot Offset 144 m
 Charge Size . 50 lb
 Average Seis Depth 15 m

RECORDING PARAMETERS
 System 10,000
 Record Length 50
 Sample 2 ms
 GAGC Trip 0.47s Rate 80db/s
 Init 4.5 db Final 100 db
 Filters Hi 70 cps 24 db/oct
 Lo 8 cps 24 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 T&R
 4.0 db/sec
 Fram 0 sec to 4.0 sec
 Water Velocity 1524 mps
 Replacement Vel 1524 mps

DECONVOLUTION
 Time Varying ARD I
 Filter Length 212 m sec
 Gate Length 2200 m sec
 No of Gates/Trace 2
 Initial times, Gate No 1 :-
 Tr1 1.2 sec, Tr 2 4.0-4.6 sec
 Final times, Gate No 2 :-
 Tr1 4.5 sec, Tr 2 3.76 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes Diversity Stack NO
 First Break Suppression
 T₁=0 sec T₂=1.0 sec
 T₃=0.6 sec T₄=1.2 sec
 T₅=0.8 sec T₆=1.4 sec

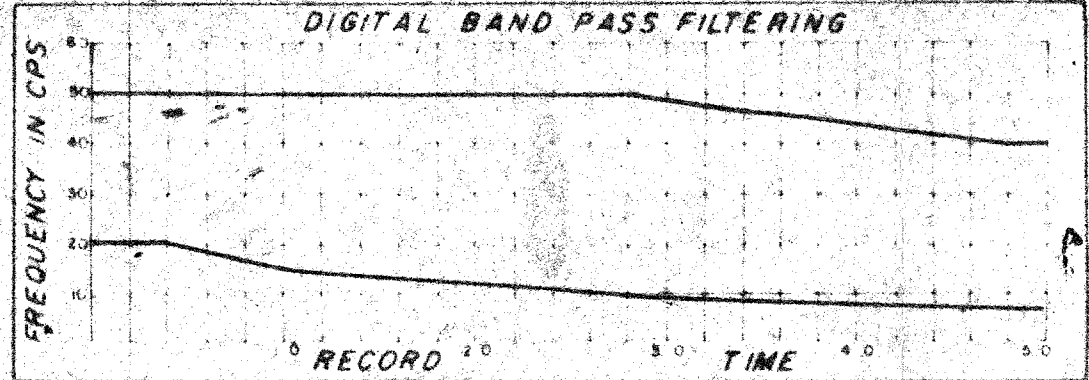

DISPLAY	REQ. N°	L-3481
Analog Filters OUT-OUT	Section N°	2014-C
Straight Gain	System Code	MSTV-2
+18 + 0 - 8 = +10	Assembled by	V. GEADA
Tapes HTL 2060	Checked by	B. B/665
HTL		

57 57 WATER DEPTH IN WATER 58 60 62 64 67 68 68 68 68 69 70 70
 K 2581 2580 2570 2560 2550 2540 2530 2520 2510 2500 2490 2480 2470 K 2462

