


SHOOTING PARAMETERS
6-Fold Off End
Shot by G.S.I. PTY 903
Cable Length 1600 m
Group Interval 67 m
Shot Point Interval 1.4 m
Average Shot Offset 1 m
Charge Size 50 lb
Average Seis. Depth 15 m

RECORDING PARAMETERS
System 10,000
Record Length 5-0
Sample 2 ms
GAGC Trip 0.47s Rate 80db/s
Init. 4.5 db/Final 100 db
Filters Hi 70 cps. 24 db/oct
Lo 8 cps. 24 db/oct
2ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
sec 4.0 db/sec
From 0 sec to 4.0 sec
Water Velocity 1524 mps
Replacement Vel 1524 mps

DECONVOLUTION
Time Varying ARD I
Filter Length 212 msec
Gate Length 2200 msec
No of Gates/Trace 2
Initial times, Gate No 1 :-
Tr 1 1.2 sec, Tr 2 4.0 46 sec
Final times, Gate No 2 :-
Tr 1 4.5 sec, Tr 2 4.3 76 sec

6-FOLD STACK
Optimum Wide Band Stack
RNMO Yes, Diversity Stack NO
First Break Suppression
T₁ = 0 sec T₂ = 1.0 sec
T₃ = 0.6 sec T₄ = 1.2 sec
T₅ = 0.8 sec T₆ = 1.4 sec

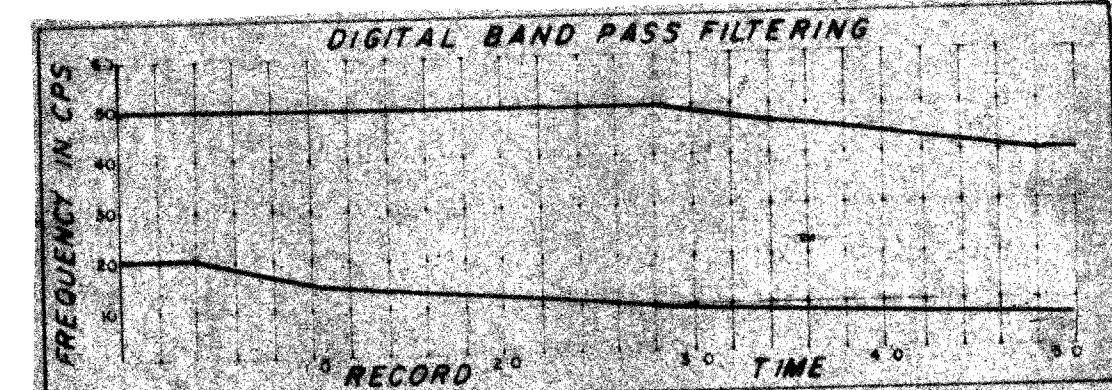

DISPLAY
Analog Filters OUT-OUT
Straight Gain
+18 + 0 - 6 = +12
Tape HTL 2080

REQ. N° L-3569
Section N° 2015-C
System Code MSTV-2
Assembled by V. GEADA
Checked by B. BRIGGS

25 METERS 27 30 34 36 40 46 47 50
K 2690 2680 2670 2660 2650 2640 2630 2620 2610
LINE B 442
SP. K 2190 52 55 55
2600 2590 K 2582

