


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I. PTY 903
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 160m
 Charge Size 33 1/2 lb
 Average Seis Depth 16 m

RECORDING PARAMETERS
 System 10,000
 Record Length 5.0 secs
 Sample 2 ms
 GAGC Trip 0.47s Rate 80 db/s
 Init 48 db Final 100 db
 Filters Hi 70 cps 24 db/oct
 Lo 8 cps 24 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & AMO
 TAR
 wc = 4.0 db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1524 mps
 Replacement Vel 1524 mps

DECONVOLUTION
 Time Varying ARD 1
 Filter Length 220 msec
 Gate Length 220 msec
 No of Gates / Track 2
 Initial times, Gate No 1 :
 Tr 1 1.2 sec, Tr 2 0.46 sec
 Final times, Gate No 2 :
 Tr 1 0.5 sec, Tr 2 3.75 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Res Diversity Stack No
 First Break Suppression
 T₁ 0.4 sec T₂ 0.8 sec
 T₃ 0.4 sec T₄ 1.0 sec
 T₅ 0.6 sec T₆ 1.2 sec

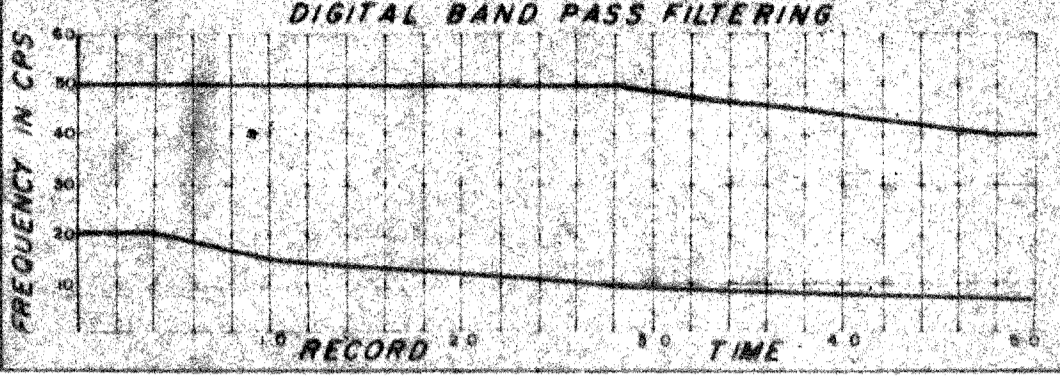

| | | |
|------------------------|--------------|-------------|
| DISPLAY | REQ N° | L-3451 |
| Analog Filters OUT-OUT | Section N° | 4012C |
| Straight Gain | System Code | MSTV-2 |
| +12 + 0 -12 + - 0 | Assembled by | R. Kaly |
| Tapes HTL 4031 | Checked by | [Signature] |
| HTL | | |

