


**SHOOTING PARAMETERS**  
6-Fold Off End  
Shot by G.S.I. PTY 903  
Cable Length 1600 m  
Group Interval 67 m  
Shot Point Interval 134 m  
Average Shot Offset 160 m  
Charge Size 33 2/3 lb  
Average Seis Depth 17 m

**RECORDING PARAMETERS**  
System 10,000  
Record Length 5.0 secs  
Sample 2 ms  
GAGC Trip 0.475 Rate 80 db/9s  
Int 48 db Final 100 db  
Filters Hi 70 cps 24 db/oct  
Lo 8 cps 24 db/oct  
2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
TAR  
sc = 4.0 db/sec  
Errm 0 sec to 4.0 sec  
Water Velocity 1524 mps  
Replacement Vel 1524 mps

**DECONVOLUTION**  
Time Varying ARD1  
Filter Length 220 msec  
Gate Length 2200 msec  
No of Gates/Trace 2  
Initial Times, Gate No 1 :  
Tr1 1.2 sec, Tr2 0.46 sec  
Final Times, Gate No 2 :  
Tr1 4.5 sec, Tr2 4.3 sec

**6-FOLD STACK**  
Optimum Wide Band Stack  
RNMO Yes, Diversity Stack No  
First Break Suppression  
T1 0 sec T2 0.8 sec  
T3 0.4 sec T4 1.2 sec  
T5 0.5 sec T6 1.4 sec

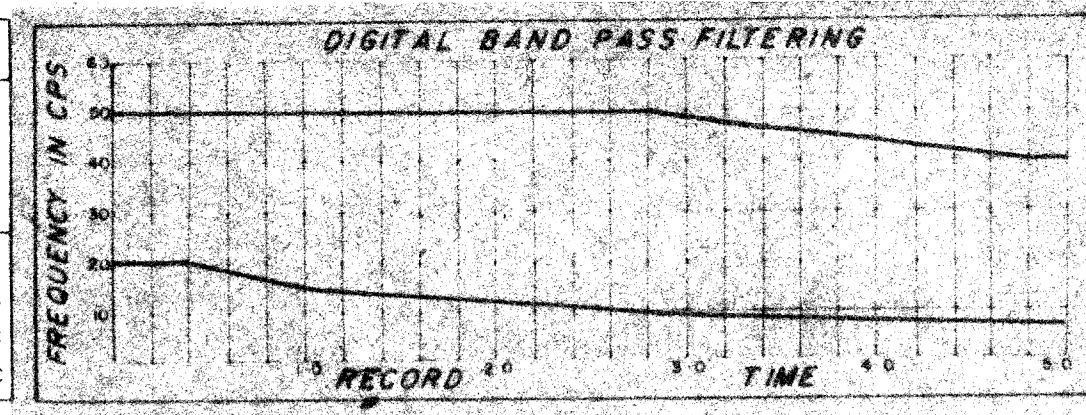

**DISPLAY**  
Analog Filters OUT - OUT  
Straight Gain +12 + C -14 - 2  
Tapes HTL 4021  
HTL

REQ N° L-3403  
Section N° 4013 C  
System Code MSTV 2  
Assembled by [Signature]  
Checked by [Signature]

LINE

33 Meters 37 42 47 46 52 54 57 59 63 66 67 69 69 Meters  
4798 4796 GAP 4795 4790 4780 4770 4760 4750 4740 4730 4720 4710 4700 4690 4680 4670 4660 4651

