


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by GS 1 PTY 903
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 160m
 Charge Size 33 1/3 lb
 Average Sea Depth 14m

RECORDING PARAMETERS
 System 10,000
 Record Length 5.0 secs
 Sample 2 ms
 GAGC Trip 0.475 Rate 80db/s
 Int 45 db/Final 100 db
 Filters Hi 70 cps 24 db/oct
 Lo 8 cps 24 db/oct
 2ms Apri Alias Filtering

SEIS EDIT & NMO
 TAR
 sec = 4.0 db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1524 mps
 Replacement Vel 1524 mps

DECONVOLUTION
 Time Varying ARD 1
 Filter Length 212 msec
 Gate Length 2220 msec
 No of Gates/Trace 2
 Initial times, Gate No 1 :-
 Tr 1.12 sec, Tr 2.4 0.45 sec
 Final times, Gate No 2 :-
 Tr 1.45 sec, Tr 2.4 3.76 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes Diversity Stack NO
 First Break Suppression
 T₁ 0 sec T₂ 0.8 sec
 T₃ 0.4 sec T₄ 1.2 sec
 T₅ 0.8 sec T₆ 1.4 sec

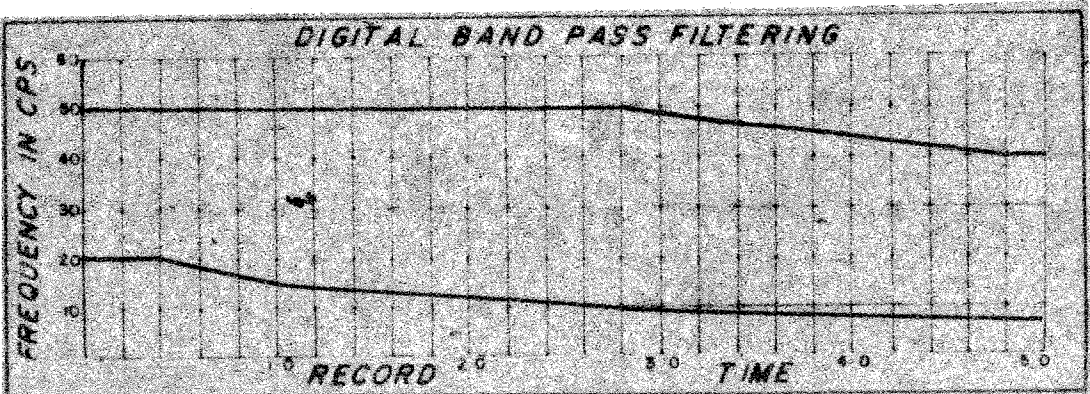

DISPLAY	REQ. N°	L-3256
Analog Filters OUT-OUT	Section N°	4009 C
Straight Gain +18 +0 -6 = +12	System Code	MSTV 2
Tapes HTL 4008	Assembled by	K. S. Farley
HTL	Checked by	D. Amis

LINE

