


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I. PTY 903
 Cable Length 1600 m
 Sample 2 ms
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 160m
 Charge Size 33/39
 Average Seis. Depth 10 m

RECORDING PARAMETERS
 System 10,000
 Record Length 9.0 sec
 Filter Length 212 msec
 Gate Length 2220 msec
 No of Gates/Trace 2
 Initial Times, Gate No 1 :-
 Tr1 1.2 sec, Tr 24. 0.45 sec
 Final Times, Gate No 2 :-
 Tr1 4.5 sec, Tr 24. 3.76 sec

SEIS EDIT @ NMO
 TAR
 $\kappa = 4.0$ db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1524 mps
 Replacement Vel 1524 mps

DECONVOLUTION
 Time Varying ARD
 Filter Length 212 msec
 Gate Length 2220 msec
 No of Gates/Trace 2
 Initial Times, Gate No 1 :-
 Tr1 1.2 sec, Tr 24. 0.45 sec
 Final Times, Gate No 2 :-
 Tr1 4.5 sec, Tr 24. 3.76 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes, Diversity Stack No
 First Break Suppression
 T₁ 0 sec T₂ 0.8 sec
 T₃ 0.4 sec T₄ 1.2 sec
 T₅ 0.6 sec T₆ 1.4 sec

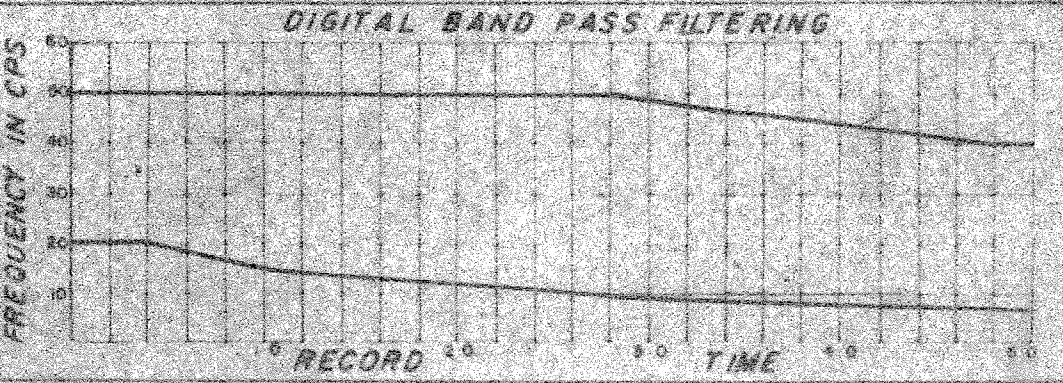

DISPLAY		REQ. N°	L-3255
Analog Filters	OUT - OUT	Section N°	4010 C
Straight Gain	+18 +0 -8 = +10	System Code	MSTV-2
Tapes HTL 4008		Assembled by	D. P. ...
HTL		Checked by	K. ...

