


**SHOOTING PARAMETERS**  
 6-Fold Off End  
 Shot by C.S.I. PTY 903  
 Cable Length 1600 m  
 Group Interval 67 m  
 Shot Point Interval 134 m  
 Average Shot Offset 160m  
 Charge Size 33 1/2 lb  
 Average Sets Depth 14 m

**RECORDING PARAMETERS**  
 System 10,000  
 Record Length 5.0 secs  
 Sample 2 ms  
 GAGC Trip 0.47s Rate 80 db/s  
 Init 45 db Final 100 db  
 Filters Hi 70 cps 24 db/oct  
 Lo 8 cps 24 db/oct  
 2ms Anti-Alias Filtering

**SEIS EDIT & NMO**  
 TAR =  
 $\omega c = 4.0$  db/sec  
 From 0 sec to 4.0 sec  
 Water Velocity 1524 mps  
 Replacement Vel 1524 mps

**DECONVOLUTION**  
 Time Varying ARD 1  
 Filter Length 212 msec  
 Gate Length 2220 msec  
 No of Gates/Trace 2  
 Initial Times, Gate No 1 :-  
 Tr 1 2 sec, Tr 2 4.0-45 sec  
 Final Times, Gate No 2 :-  
 Tr 1 4.5 sec, Tr 2 4.3-76 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes Diversity Stack No  
 First Break Suppression  
 T<sub>1</sub> 0.2 sec T<sub>2</sub> 0.8 sec  
 T<sub>3</sub> 0.4 sec T<sub>4</sub> 1.0 sec  
 T<sub>5</sub> 0.6 sec T<sub>6</sub> 1.2 sec

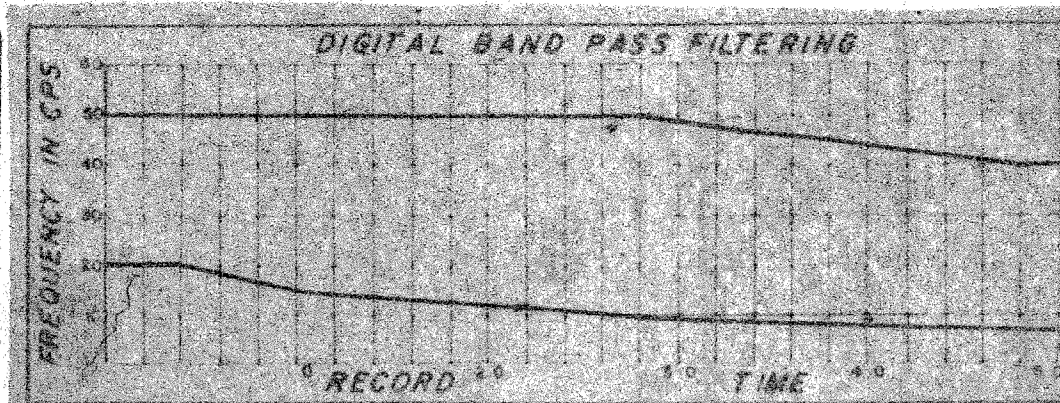

**DISPLAY**  
 Analog Filters OUT-OUT  
 Straight Gain +24 +2 -22 +4  
 Tapes HTL 4021  
 HTL

REQ. N° L-3338  
 Section N° 4007C  
 System Code MSTV-2  
 Assembled by P.P.O.  
 Checked by D. P. Mico

LINE

LINE B 443  
 S.P. 741

