


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I. PTY 903
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 160 m
 Charge Size 33% lb
 Average Sea Depth 14 m

RECORDING PARAMETERS
 System 10,000
 Record Length 5.0 sec
 Sample 2 ms
 GAGC Trip 0.47s Rate 80 db/s
 Int'l 45 db Final 100 db
 Filters Hi 70 cps, 24 db/oct
 Lo 8 cps, 24 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 sec = 4.0 db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1524 mps
 Replacement Vel 1524 mps

DECONVOLUTION
 Time Varying ARD
 Filter Length 212 msec
 Gate Length 2220 msec
 No of Gates/Trace 2
 Initial Times, Gate No 1 :
 Tr1 1.2 sec, Tr2 4.0-4.5 sec
 Final Times, Gate No 2 :
 Tr1 4.5 sec, Tr2 4.3-7.5 sec

6-FOLD STACK
 Optimum Wide Band Stack
 ANMO Yes, Diversity Stack No
 First Break Suppression
 T₁ 0 sec T₂ 0.8 sec
 T₃ 0.4 sec T₄ 1.0 sec
 T₅ 0.6 sec T₆ 1.2 sec

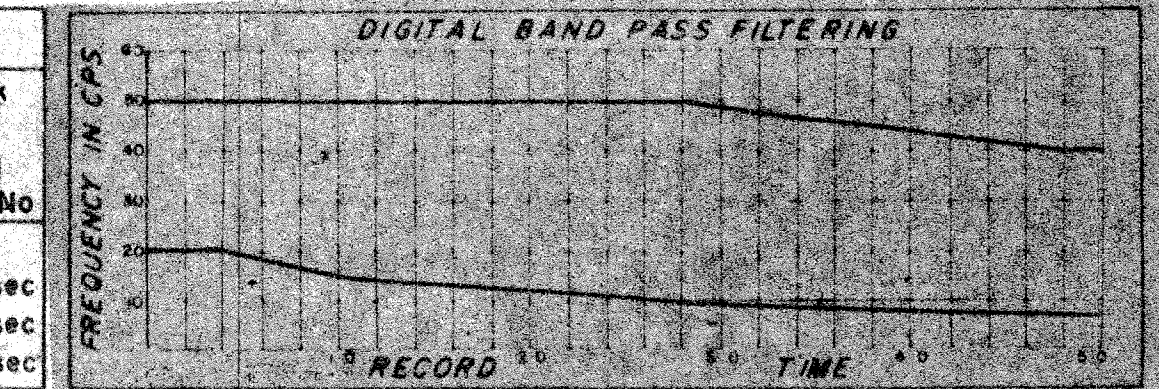

DISPLAY
 Analog Filters OUT-OUT
 Straight Gain
 +12 +0 -14 = -2
 Tapes HTL 4008
 HTL

REQ. N° L-3302
 Section N° 4006 C
 System Code MSTV-2
 Assembled by *P. Owen*
 Checked by *D. Amis*

