


SHOOTING PARAMETERS
6-Fold Off End
Shot by GS I PTY 903
Cable Length 1600 m
Group Interval 57 m
Shot Point Interval 134 m
Average Shot Offset 160 m
Charge Size 50 lb
Average Sea Depth 15 m

RECORDING PARAMETERS
System 10,000
Record Length 5-0
Sample 2 ms
GAGC Trip 0.47s, Rate 80db/s
Shot Point Interval 134 m
Filters Hi 70 cps 24 db/oct
Lo 8 cps 24 db/oct
2ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
 $\alpha = 4.0$ db/sec
From 0 sec to 4.0 sec
Water Velocity 1524 mps
Replacement Vel 1524 mps

DECONVOLUTION
Time Varying ARD I
Filter Length 212 m sec
Gate Length 2200 m sec
No of Gates/Trace 2
Initial Times, Gate No 1 :-
Tr1 1.2 sec, Tr 2 4.0 46 sec
Final Times, Gate No 2 :-
Tr1 4.5 sec, Tr 2 4.3 76 sec

6-FOLD STACK
Optimum Wide Band Stack
RNMO Yes Diversity Stack NO
First Break Suppression
T₁ 0 sec T₂ 1.0 sec
T₃ 0.6 sec T₄ 1.2 sec
T₅ 0.8 sec T₆ 1.4 sec

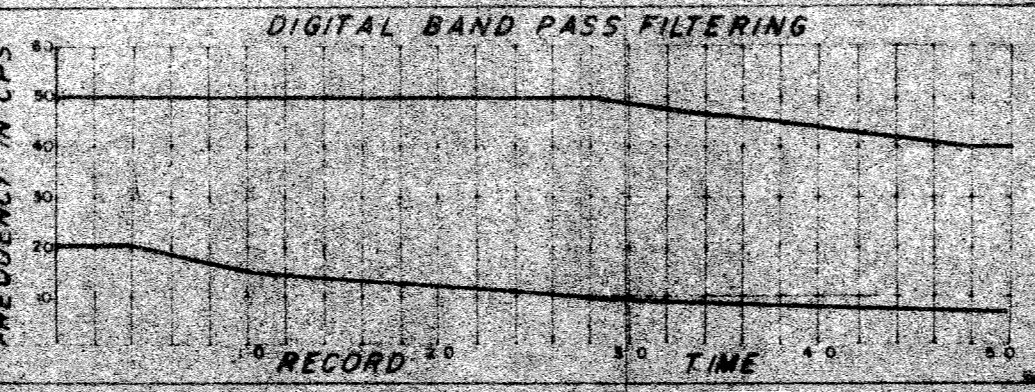

DISPLAY	REQ. N°	L-3645
Analog Filters OUT-OUT Straight Gain + 12 + 0 - 2 + 10	Section N°	2 019 C
Tape HTL 2082	System Code	MSTV-2
	Assembled by	V. GEADA
	Checked by	R. WELCH

