


**SHOOTING PARAMETERS**  
 6-Fold Off Enc  
 Shot by G.S. 1071 903  
 Cable Length 1600 m  
 Group Interval 67 m  
 Shot Point Interval 34 m  
 Average Shot Offset 50 m  
 Charge Size 33 1/3 lb  
 Average Sea Depth 15 m

**RECORDING PARAMETERS**  
 System 10.000  
 Record Length 5.0 sec  
 Sample 2 ms  
 GAGC Trip 0.475 Rate 80 db/sec  
 Int 48 db Final 100 db  
 Filters H: 70 cps 24 db/oct  
 Lo: 8 cps 24 db/oct  
 2ms Anti-alias Filtering

**SLIC EDIT & NMO**  
 TAR  
 $\sigma = 4.1$  db/sec  
 From 0 sec to 4.0 sec  
 Water Velocity 1524 mps  
 Replacement Vel 1524 mps

**DECONVOLUTION**  
 Time Varying ARD  
 Filter Length 220 msec  
 Gate Length 220 msec  
 No of Gates/Trace 2  
 Initial Times, Gate No 1: -  
 Tr 1: 2 sec, Tr 2: 0.46 sec  
 Final Times, Gate No 2: -  
 Tr 1: 4.5 sec, Tr 2: 2.4 1/2 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes/Diversity Stack No  
 First Break Suppression  
 T<sub>1</sub>: 0 sec T<sub>2</sub>: 800 sec  
 T<sub>3</sub>: 400 sec T<sub>4</sub>: 1000 sec  
 T<sub>5</sub>: 600 sec T<sub>6</sub>: 1200 sec

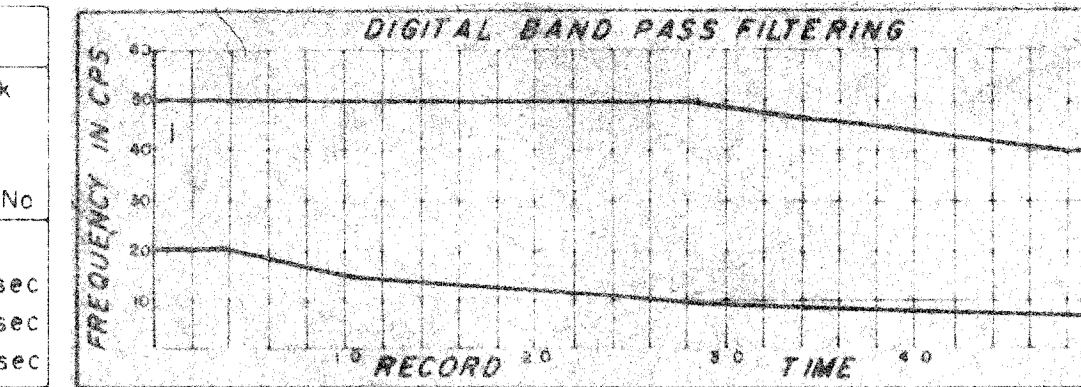

**EQUALISATION**  
 Design Gate: 1.0 to 3.5 sec

**DISPLAY**  
 Single Coverage  
 Analog Filters OUT-OUT  
 Straight Gain  
 6 - 0 - 8 - - 2  
 Tapes HTL 4055  
 HT

REQ N° L-3649  
 Section N° 4014 C  
 System Code MSTV 2  
 Assembled by *R. Favre*  
 Checked by *R. Favre*

1 N.E

