


<b>DISPLAY</b>	REQ N° 3482
Analog Filters OUT-OUT Straight Gain +12 + 0 - 6 = + 6	Section N° 4002C
Tapes HTL 4031 HTL	System Code V 2
	Assembled by J. Amico
	Checked by P. P. O. <i>P.P.O.</i>

N.E.

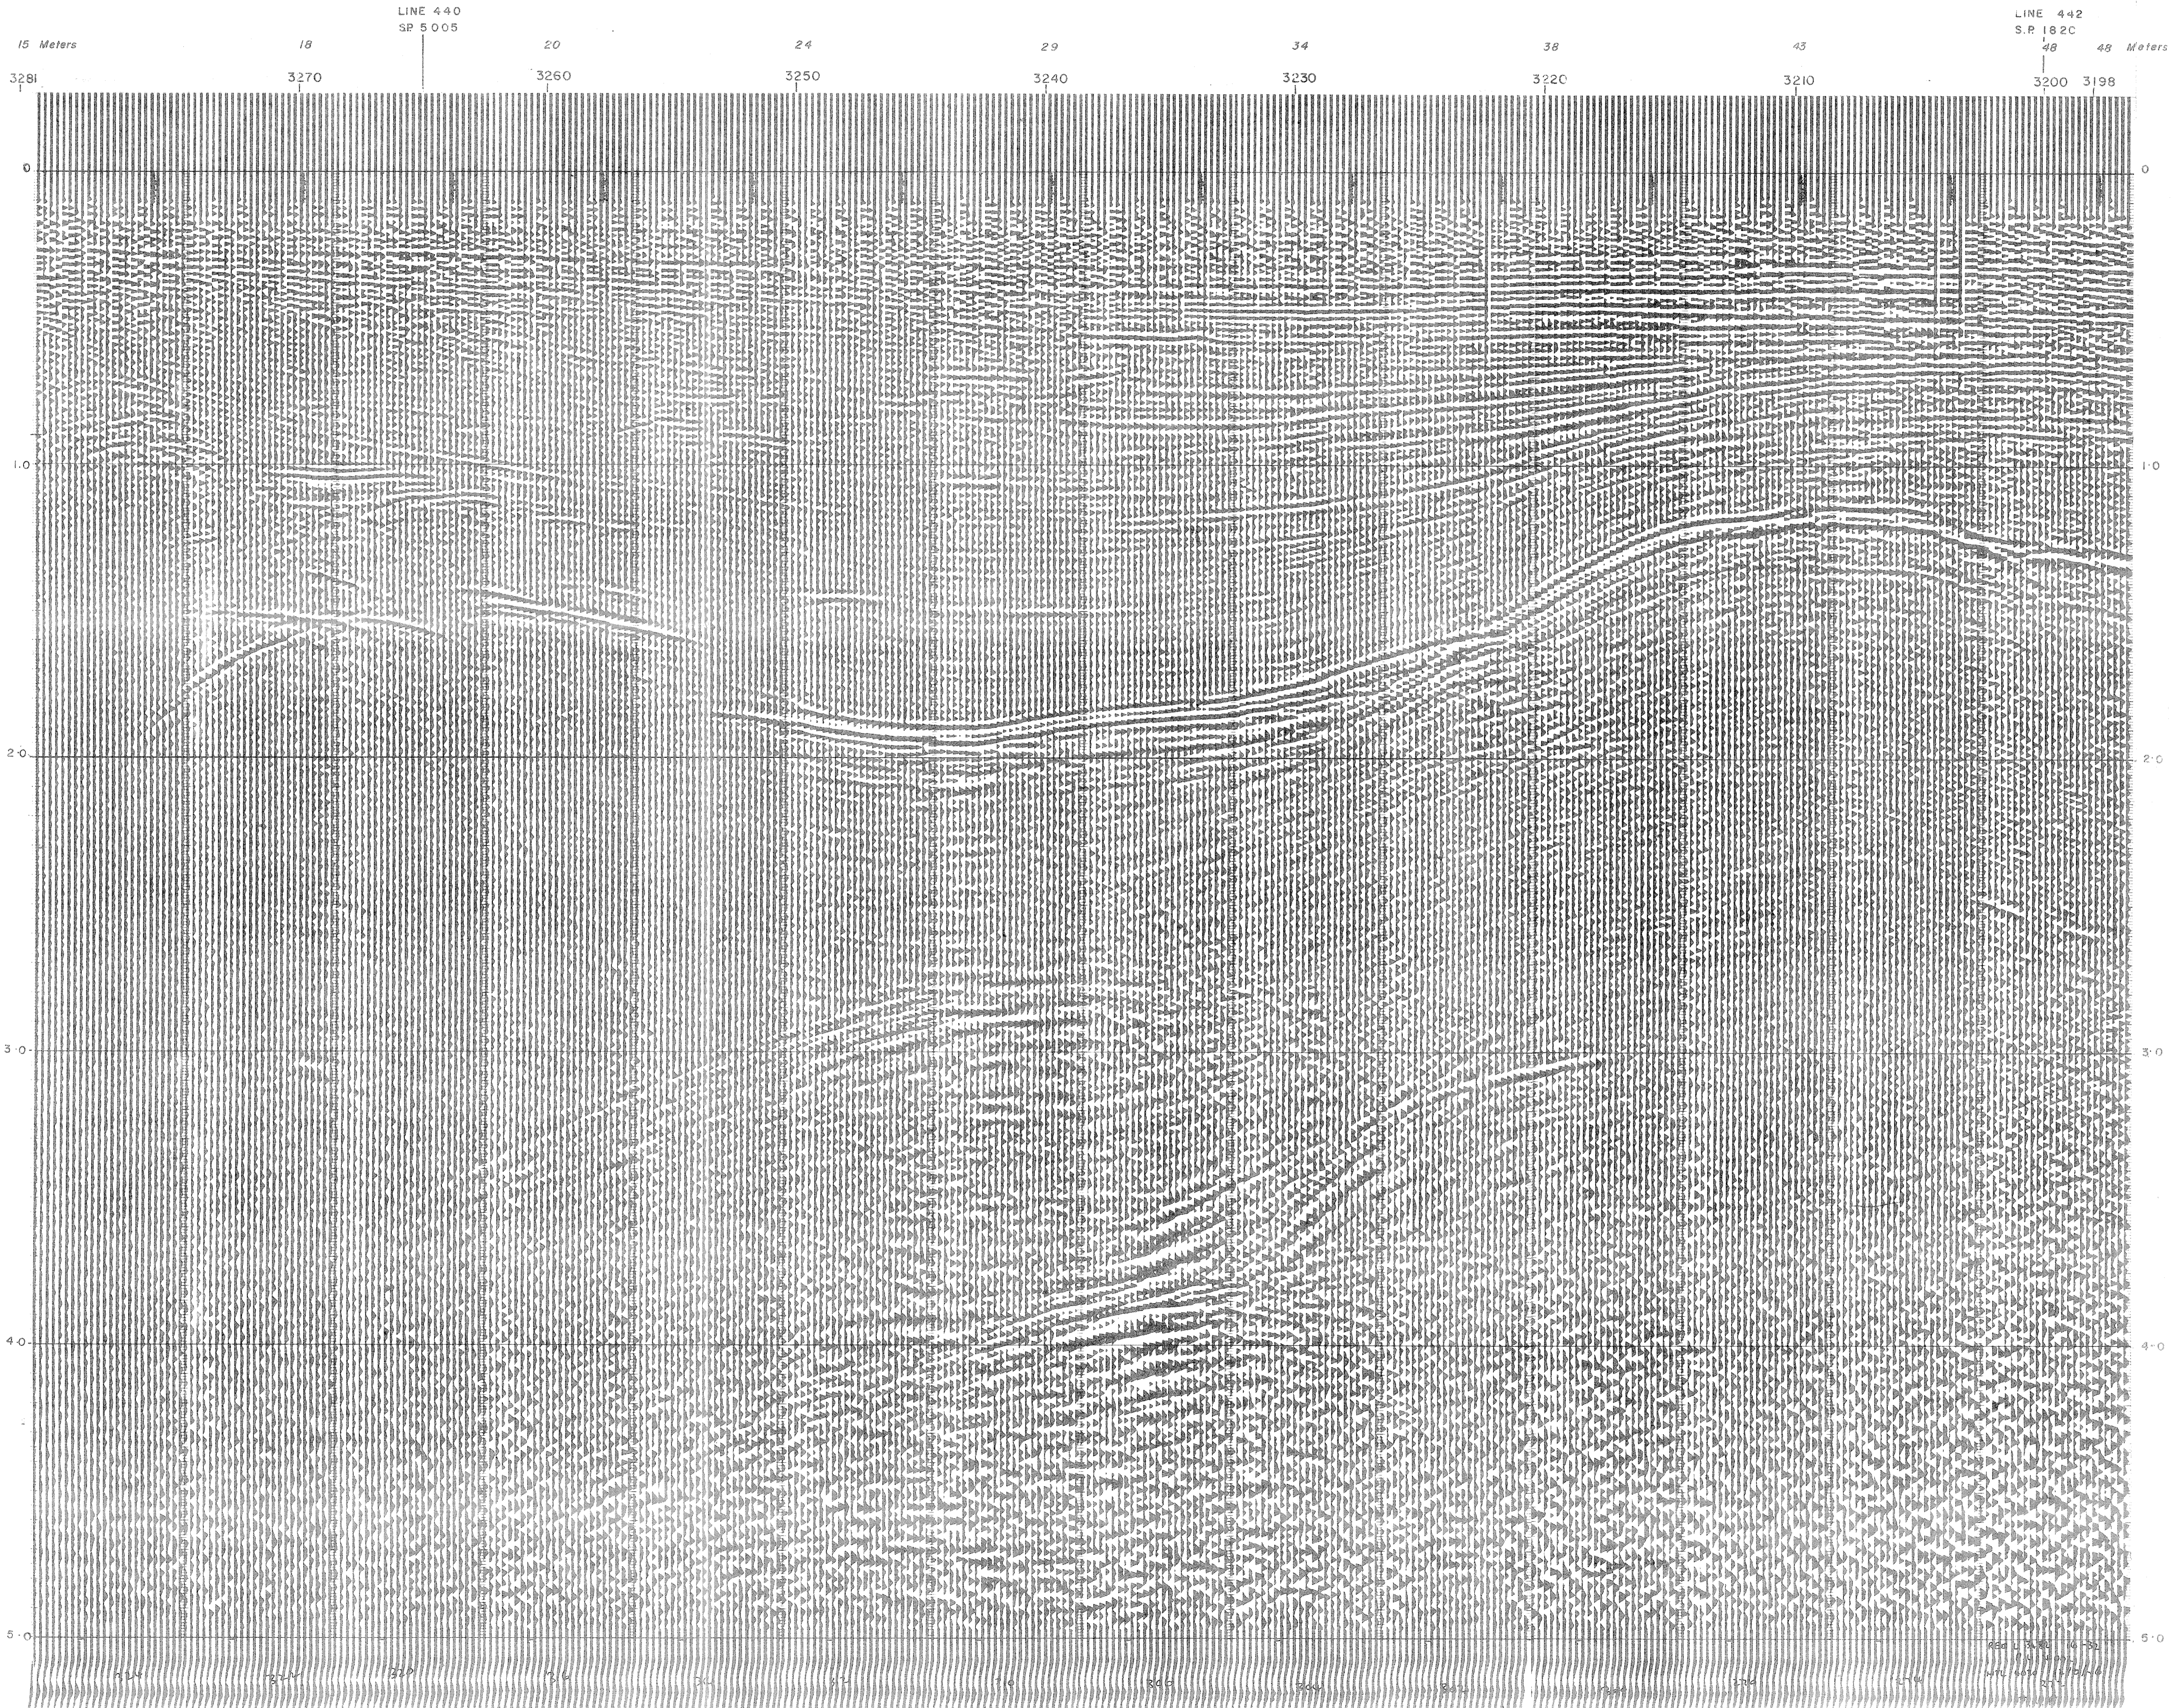

**SHOOTING PARAMETERS**

Shot by U.S.I. FTY 903  
 Code Length 1800 m  
 Group Interval 67 m  
 Shot Point Interval 134 m  
 Average Shot Offset 60m  
 Average Size 33 1/2 lb  
 Average Sea Depth 5 m

**RECORDING PARAMETERS**

System 10,000  
 Record Length 5.0 sec.  
 Sample 2ms  
 GAGC Tri-Quad Rate 80 dB  
 Filter Hi 70 cps 24 dB/oct  
 Lo 8 cps 24 dB/oct  
 2ms Anti Alias Filtering

**SEIS EDIT - BMMO**

TAR  
 $\mu$  = 4.1 db/sec  
 From 0 sec to 4.0 sec  
 Water Velocity 1524 mps  
 Repositionment Vel 1524 mps

**DECONVOLUTION**

Time Varying ARFI  
 Filter Length 220 msec  
 No of Gains/Trace 2  
 Initial Times Gain No 1  
 T1 1.2 sec, T2 2.4, 0.46 sec  
 Final Times Gain No 2, 1  
 T1 1.5 sec, T2 3.0, 0.75 sec

**6-FOLD STACK**

Optimum Wide Band Stack  
 BMMO Velocity Stack NO  
 First Break Suppression  
 T1 0.4 sec T2 0.8 sec  
 T3 0.4 sec T4 1.0 sec  
 T5 0.6 sec T6 1.2 sec

