


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G S I P T Y 303
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 160m
 Charge Size 35 7/8 lb
 Average Sea Depth 15 m

RECORDING PARAMETERS
 System 10,000
 Record Length 5.0 sec
 Sample 2 ms
 GAGC Trip 0.47s Rate 80db/s
 Int 4.8 db Final DO db
 Filters H: 70 cps 24 db/oct
 Lo: 8 cps 24 db/oct
 2ms Anti Alias Filtering

SEIS EDIT @ NMO
 T&R
 $\omega_c = 4.0$ db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1524 mps
 Replacement Vel 1524 mps

DECONVOLUTION
 Time Varying ARD
 Filter Length 220 msec
 Gate Length 2200 msec
 NP of Gates/Trace 2
 Initial times, Gate NP 1 :-
 Tr1: 1.2 sec, Tr 2: 0.46 sec
 Final times, Gate NP 2 :-
 Tr1: 4.5 sec, Tr 2: 3.75 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes Diversity Stack No
 First Break Suppression
 T₁: 0 sec T₂: 800 sec
 T₃: 400 sec T₄: 1000 sec
 T₅: 500 sec T₆: 1200 sec

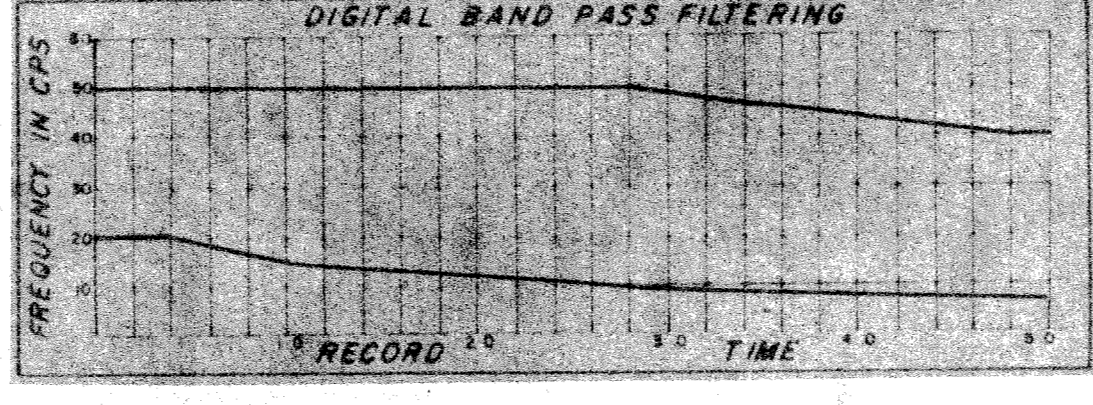

| | | | |
|-----------------|-------------------|--------------|------------|
| DISPLAY | | REQ. N° | L-3483 |
| Single Coverage | Analog Filters | OUT - OUT | Section N° |
| Straight Gate | +12 + 0 - 10 + +2 | | 400 C |
| | | System Code | MSTV-2 |
| | | Assembled by | R. J. O... |
| Tapes HTL 4031 | HTL | Checked by | R. J. O... |

