


SHOOTING PARAMETERS
6-Fold Off End
Shot by GS 1 PTY 903
Cable Length 1600 m
Group Interval 67 m
Shot Point Interval 134 m
Average Shot Offset 160m
Charge Size 33 1/2 lb
Average Seis Depth 16 m

RECORDING PARAMETERS
System 10,000
Record Length 5.0 secs
Sample 2 ms
GAGC Trip 0.47s Rate 80 db/s
Mit 48 db/ftal 100 db
Filters Hi 70 cps 24 db/oct
Lo 8 cps 24 db/oct
2ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
v = 4.0 db/sec
From 0 sec to 4.0 sec
Water Velocity 1524 mps
Replacement Vel 1524 mps

DECONVOLUTION
Time Varying ARD
Filter Length 220 msec
Gate Length 2200 msec
N° of Gates/Trace 2
Initial Times, Gate N° 1 :-
Tr 1 2 sec, Tr 2 4.0 46 sec
Final Times, Gate N° 2 :-
Tr 1 4.5 sec, Tr 2 3.75 sec

6-FOLD STACK
Optimum Wide Band Stack
RNMO 1% Diversity Stack No
First Break Suppression
T₁ 0.4 sec T₂ 0.8 sec
T₃ 0.4 sec T₄ 1.0 sec
T₅ 0.6 sec T₆ 1.2 sec

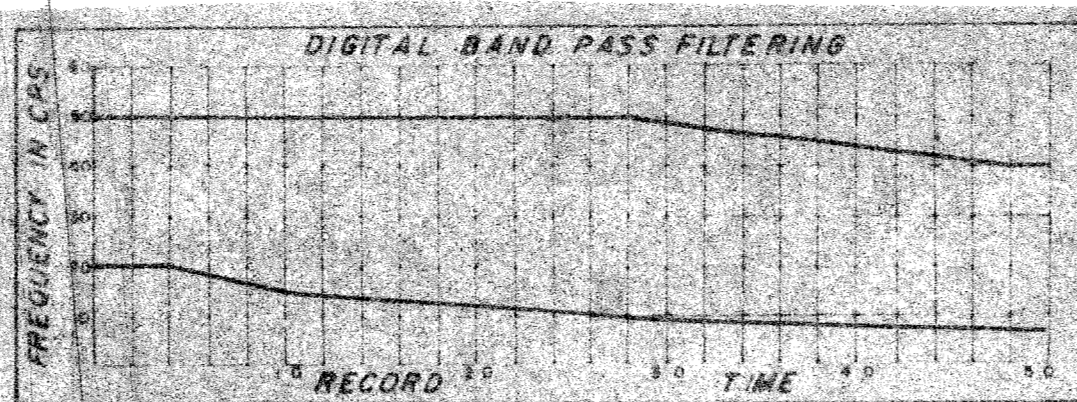

DISPLAY
Analog Filters OUT-OUT
Straight Gain
+12 + 0 - 10 + 2
Topes HTL 4042
HTL

REQ. N° L-3537
Section N° 4C03C
System Code MSTV-2
Assembled by P. J. O.
Checked by P. J. O.

LINE B 440 S.P. 5087 26
Meters 22 27 29 33 38 42 46 51 54 52 60 63 64 66 69 69
3283 3290 3300 3310 3320 3330 340 3350 3360 3370 3380 3390 3400 3410 3420 3430 3432

