


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I. PTY 903
 Cable Length 1800 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 160 m
 Charge Size 35 1/2 lb
 Average Sets Depth 15 m

RECORDING PARAMETERS
 System 10,000
 Record Length 5-0 secs.
 Sample 2 ms
 GAGC Trip 0.47s Rate 60 db/s
 Init 48 db Final 100 db
 Filters Hi 70 cps, 24 db/oct
 Lo 8 cps, 24 db/oct
 2ms Anti Alias Filtering

DECONVOLUTION
 Time Varying ARD I
 Filter Length 220 msec
 Gate Length 2200 msec
 No of Gates/Trace 2
 Initial Times, Gate No 1 :-
 Tr1 1.2 sec, Tr 2 4.0-46 sec
 Final Times, Gate No 2 :-
 Tr1 4.5 sec, Tr 2 4.3-76 sec

SEIS EDIT & NMO
 TAR
 $\omega = 4.0$ db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1524 mps
 Replacement Vel. 1524 mps

6-FOLD STACK
 Optimum Wide Band Stack
 RMMO Yes Diversity Stack Yes
 First Break Suppression
 T1 0 sec T2 0.6 sec
 T3 0.2 sec T4 0.8 sec
 T5 0.4 sec T6 1.0 sec

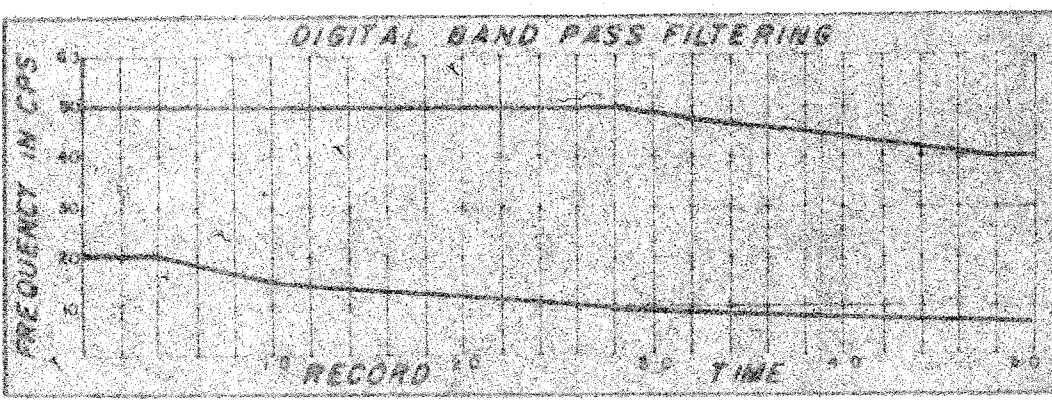

DISPLAY
 Analog Filters OUT-OUT
 Straight Gain
 +18 +0 -18 = -0
 Tapes HTL 4 053
 HTL

REG. N° L-3642
 Section N° 4017 C
 System Code MSTV-2
 Assembled by [Signature]
 Checked by K.J.F.

LINE B 443
S.P. K 432

Meters 77 78

K5286 5280 5270 5260 5250 5240 5230 5220 5210 5200 5190 5180 5170 K5167

