


**SHOOTING PARAMETERS**  
6-Fold Off End  
Shot by G.S.I. PTY 903  
Cable Length 1600 m  
Group Interval 67 m  
Shot Point Interval 134 m  
Average Shot Offset 160m  
Charge Size 33 1/2 lb  
Average Seis. Depth 14 m

**RECORDING PARAMETERS**  
System 10,000  
Record Length 5.0 secs.  
Sample 2 ms  
GAGC Trip 0.47s Rate 80 db/s  
Int 45 db Final 60 db  
Filters Hi 70 cps 24 db/oct  
Lo 8 cps 24 db/oct  
2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
TAR  
sec = 4.0, db/sec  
From 0 sec to 4.0 sec  
Water Velocity 1524 mps  
Replacement Vel 1524 mps

**DECONVOLUTION**  
Time Varying ARD1  
Filter Length 220 msec  
Gate Length 2200 msec  
No of Gates/Trace 2  
Initial times, Gate No 1 :-  
Tri 1.2 sec, Tr 24.0 46 sec  
Final times, Gate No 2 :-  
Tri 4.5 sec, Tr 24.3 76 sec

**6-FOLD STACK**  
Optimum Wide Band Stacks  
RMSC Yes, Diversity Stack No  
First Break Suppression  
T<sub>0</sub> 0.4 sec T<sub>1</sub> 1.0 sec  
T<sub>2</sub> 0.4 sec T<sub>3</sub> 1.2 sec  
T<sub>4</sub> 0.8 sec T<sub>5</sub> 1.4 sec

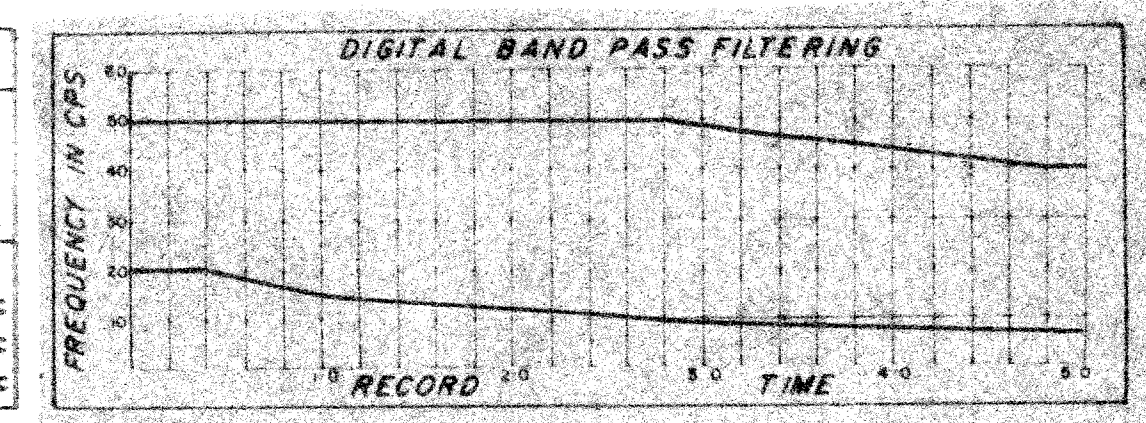

**DISPLAY**  
Anding Filters OUT-OUT  
Straight Gain  
+12 + 4 -22 = -6  
Tapes HTL 4053  
HTL

**REQ. N°** L-3659  
**Section N°** 4019C  
**System Code** MSTV-2  
**Assembled by** H. R. ...  
**Checked by** ...

65 Meters 66 68 70 71 72 74 76 78 80 81 85 86 87 88 Meters 89  
K9225 9230 9240 9250 9260 9270 9280 8290 9300 9310 9320 9330 9340 9350 9360 9370 K9274

