


**SHOOTING PARAMETERS**  
6-Fold Off End  
Shot by G.S.I. PTY 903  
Cable Length 1600 m  
Group Interval 67 m  
Shot Point Interval 134 m  
Average Shot Offset 160m  
Charge Size 50 lb  
Average Sea Depth 13 m

**RECORDING PARAMETERS**  
System 0,000  
Record Length 5.0 sec  
Sample 2 ms  
GAGC Trip 0.47s Rate 80 db/s  
Init 4.2 db Final 100 db  
Filters Hi 70 cps 24 db/oct  
Lo 8 cps 24 db/oct  
2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
TAR  
vc = 4.0 db/sec  
From 0 sec to 4.0 sec  
Water Velocity 1524 mps  
Replacement Vel 1524 mps

**DECONVOLUTION**  
Time Varying ARD  
Filter Length 220 msec  
Gate Length 2200 msec  
No of Gates/Trace 2  
Initial times, Gate No 1 :-  
Tr 1 1.2 sec, Tr 2 0.46 sec  
Final times, Gate No 2 :-  
Tr 1 4.5 sec, Tr 2 3.76 sec

**6-FOLD STACK**  
Optimum Wide Band Stack  
RNMO Yes, Diversity Stack Yes  
First Break Suppression  
Tr 0 0 sec Tr 0 0.8 sec  
Tr 0 4 sec Tr 1 1.0 sec  
Tr 0 6 sec Tr 1 1.2 sec

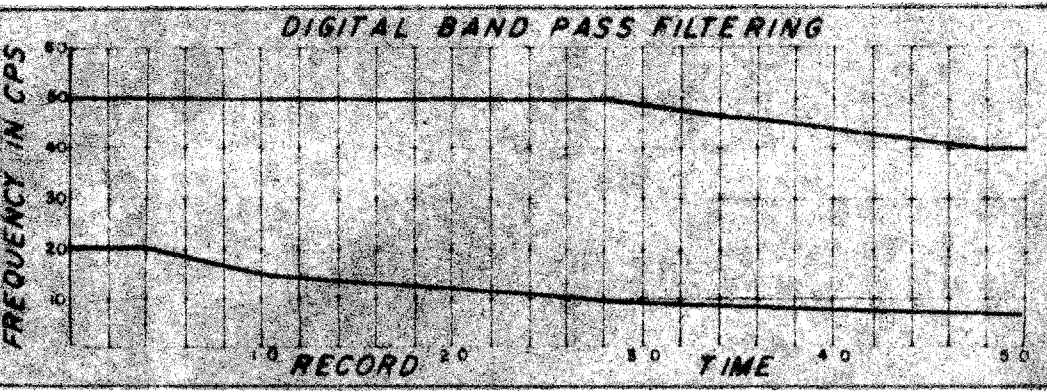

**DISPLAY**  
Single Coverage  
Analog Filters OUT-OUT  
Straight Gain  
+12 + 0 - 18 = -6  
Tapes HTL 4060  
HTL

REQ. N° L-3681  
Section N° 4020 C  
System Code MSTV-2  
Assembled by [Signature]  
Checked by [Signature]

88 Meters 88 88 88 90 89 90 89 88 89 86 85 85 84 Meters 83  
K 9374 9380 4390 9400 9400 9420 9430 9440 9450 9460 9470 9480 9490 9500 9510 K 9520

