


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G5 PTY 903
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 34 m
 Average Shot Offset 60m
 Charge Size 50 lb
 Average Seis Depth 14 m

RECORDING PARAMETERS
 System 0,000
 Record Length 5.0 sec
 Sample 2 ms
 GAGC Type 2475 (Line 00) dnd
 Int 45 db (end 00) db
 Filters H: 70 cps 24 db/oct
 Lo: 8 cps 24 db/oct
 2ms Ant. Alias Filtering

SEIS EDIT & NMO
 T.A.S.
 Gain - 40 db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1524 mps
 Replacement Vel 1524 mps

DECONVOLUTION
 Time Varying S.M.P.
 Filter Length 22 msec
 Gate Length 2250 msec
 No of Gates 100
 Initial Times Gate No 1
 Tr 1 2 sec, Tr 24 1.46 sec
 Final Times Gate No 1
 Tr 1 5 sec, Tr 24 1.7 sec

6-FOLDING
 Optimum With Phase Shift
 R.N.M.C. Yes
 First Break Suppression
 T: 0 sec, T: 0.8 sec
 T: 0.4 sec, T: 1.0 sec
 T: 0.6 sec, T: 1.2 sec

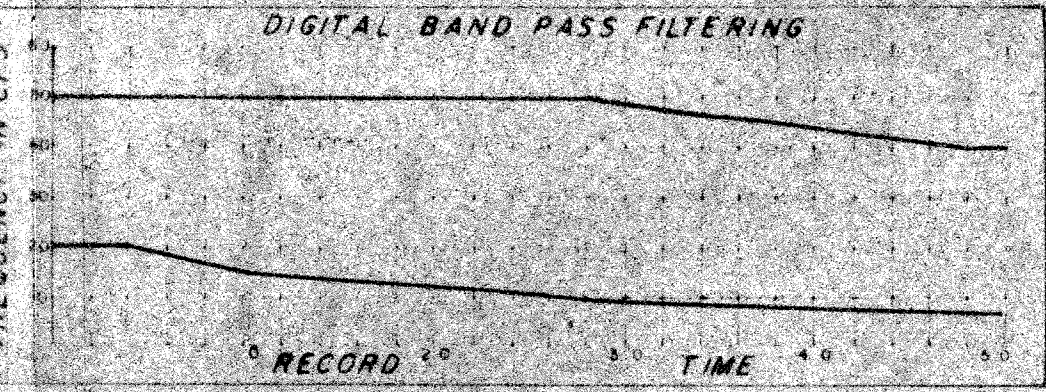

DISPLAY
 ANALOG FILTERS
 12 0 12 0
 Tapes 4060

REQ NO 3696
 SURFACE 4023C
 REVISION 2
 APPROVED BY K. Farley
 CHECKED BY P. ...
 NE

Meters 25 26 28 33 38 44 49 53 59 62 63 65 Meters 66
 K9224 9220 9210 9200 9190 9180 9170 9160 9150 9140 9130 9120 9110 9100 K9092

