


SHOOTING PARAMETERS
6-Fold Off End
Shot by G.S.I. PTY 903
Cable Length 1800 m
Group Interval 67 m
Shot Point Interval 134 m
Average Shot Offset 160m
Charge Size 50 lb
Average Sea Depth 13 m

RECORDING PARAMETERS
System 10,000
Record Length 5.0 secs
Sample 2 ms
GAGC Trip Rate 80db/dB
Init 43 dbFinal 100 db
Filters Hi 70 cps 12 db/oct
Lo 12 cps 12 db/oct
2ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
w = 4.0 db/sec
From 0 sec to 4.0 sec
Water Velocity 1524 mps
Replacement Vel 1524 mps

DECONVOLUTION
Time Varying ARD1
Filter Length 220 msec
Gate Length 220 msec
No of Gates/Trace 2
Initial Times, Gate #1 :-
Tr1 1.2 sec, Tr 2.4, 0.66 sec
Final Times, Gate #2 :-
Tr1 4.5 sec, Tr 2.4, 0.76 sec

6-FOLD STACK
Optimum Wide Band Stack
RMMO Yes, Diversity Stack Yes
First Break Suppression
T₁ 0 sec T₂ 0.8 sec
T₃ 0.4 sec T₄ 1.2 sec
T₅ 0.6 sec T₆ 1.4 sec

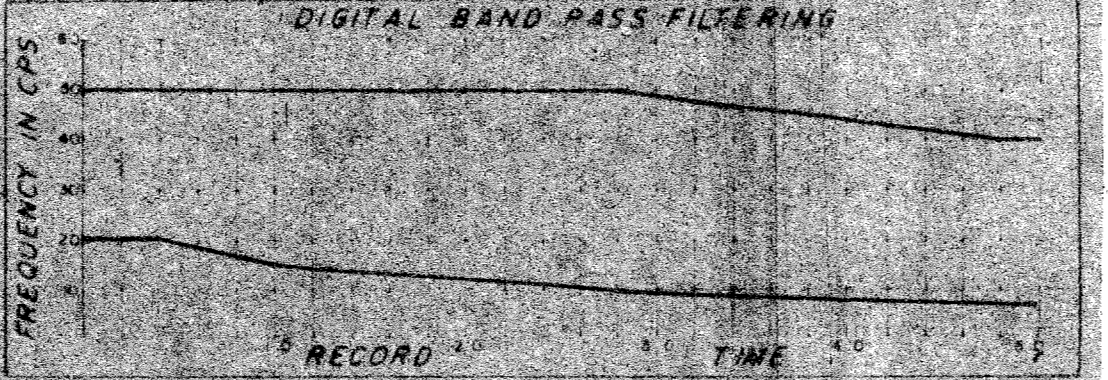

DISPLAY		REQ. N°	L-3728
Analog Filters OUT-OUT Straight Gain +18 -0 -18 -0		Section N°	4026 C
Tapes HTL 4064 HTL		System Code	MSTV-2
		Assembled by	C.F.O.
		Checked by	K.S.T.

LINE B 443 S.P. K 6169
83 Meters 85 86 87 87 90 92 94 95 98 92 92 89 88 89 91 90 Meters 90
K 8606 8610 8620 8630 8640 8650 8660 8670 8680 8690 8700 8710 8720 8730 8740 8750 8760 8770 8780 8790 K 8791

