


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by C.S.I. PTY 903
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 160 m
 Charge Size 33 1/3 lb
 Average Sea Depth 15 m

RECORDING PARAMETERS
 System 10,000
 Record Length 5-0
 Sample 2 ms
 GAGC Trip 0.47s Rate 800/s
 Init 45 db Final 100 db
 Filters Hi 70 cps 24 db/oct
 Lo 12 cps 12 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 $\alpha = 4.0$ db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1524 mps
 Replacement Vel 1524 mps

DECONVOLUTION
 Time Varying ARD I
 Filter Length 212 msec
 Gate Length 2200 msec
 No of Gates/Trace 2
 Initial times, Gate No 1 :-
 Tr1 1.2 sec, Tr2 4.0-4.6 sec
 Final times, Gate No 2 :-
 Tr1 4.5 sec, Tr2 3.76 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes, Diversity Stack No
 First Break Suppression
 T_1 0 sec T_2 1.0 sec
 T_3 0.6 sec T_4 1.2 sec
 T_5 0.8 sec T_6 1.4 sec

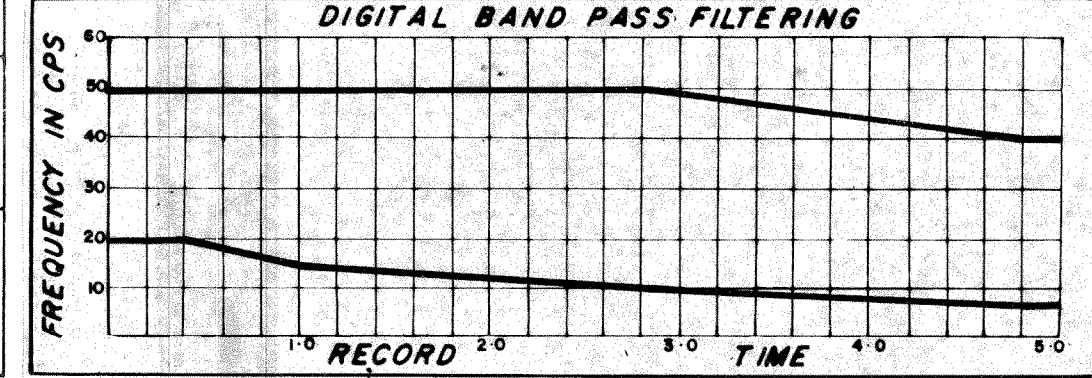

DISPLAY	REQ. N° L-3999
Analog Filters OUT-OUT Straight Gate +6 +0 -12 = -6	Section N° 2040-C
Tape HTL 2152	System Code MSTV-2
	Assembled by V.GEADA
	Checked by R.W. Bach

18 METERS 20 21 LINE B 439 SRK 13962 23 25 28 32 38 LINE B 440 SRK 13087 45 52 57 62 62 62 62
 K8309 8300 8290 8280 8270 8260 8250 8240 8230 8220 8210 8200 8190 8180 K8173

