


**SHOOTING PARAMETERS**  
 6-Fold Off End  
 Shot by G.S.I. PTY 903  
 Cable Length 1600 m  
 Group Interval 67 m  
 Shot Point Interval 134 m  
 Average Shot Offset 160 m  
 Charge Size 33 1/3 lb  
 Average Seis. Depth 15 m

**RECORDING PARAMETERS**  
 System 10,000  
 Record Length 5.0  
 Sample 2 ms  
 GAIN Trip 2435 Rate 90db/s  
 Int. 45 db Final 100 db  
 Filters Hi 70 cps 24 db/oct  
 Lo 12 cps 12 db/oct  
 2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
 TAR  
 $\alpha = 4.0 \text{ db/sec}$   
 From 0 sec to 4.0 sec  
 Water Velocity 1524 mps  
 Replacement Vel 1524 mps

**DECONVOLUTION**  
 Time Varying ARD I  
 Filter Length 212 msec  
 Gate Length 2200 msec  
 No of Gates/Trace 2  
 Initial times, Gate No 1 :-  
 Tr1 1.2 sec, Tr 2 4.0 46 sec  
 Final times, Gate No 2 :-  
 Tr1 4.5 sec, Tr 2 3.76 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes, Diversity Stack NO  
 First Break Suppression  
 T<sub>1</sub> 0.6 sec T<sub>2</sub> 1.0 sec  
 T<sub>3</sub> 0.6 sec T<sub>4</sub> 1.2 sec  
 T<sub>5</sub> 0.8 sec T<sub>6</sub> 1.4 sec

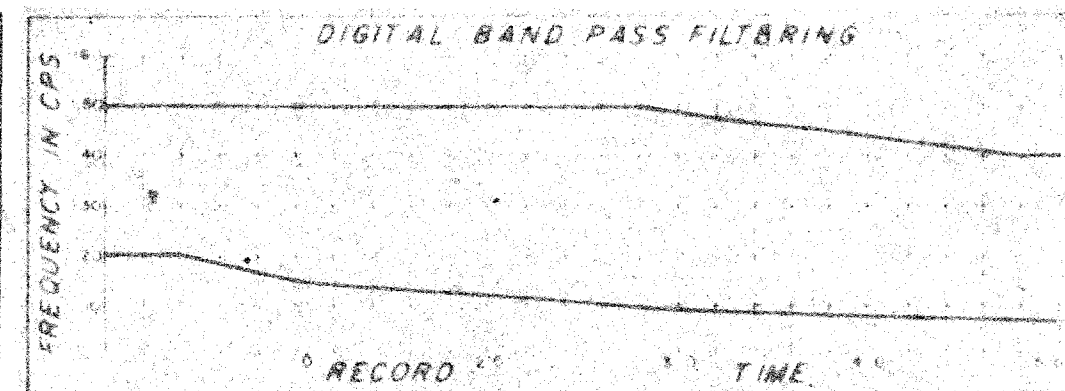

**DISPLAY**  
 Analog Filters OUT-OUT  
 Straight Gate  
 +24 + 0 -20 + 4  
 Tape HTL 2133

REQ. N° L-3953  
 Section N° 2039-C  
 System Code MSTV-2  
 Assembled by V. GEADA  
 Checked by *[Signature]*

LINE B 441  
 SP K 5566

LINE B 442  
 SP K 5566

