


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I. P11-903
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 160 m
 Charge Size 331/3 lb
 Average Sea Depth 15 m

RECORDING PARAMETERS
 System 10,000
 Record Length 5-0
 Sample 2 ms
 GAGC Trip 0.47 s Rate 80 db/s
 Init. 45 db Final 100 db
 Filters Hi 70 cps 24 db/oct
 Lo 12 cps 12 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 T&R
 a 4.0 db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1524 mps
 Replacement Vel 1524 mps

DECONVOLUTION
 Time Varying ARD I
 Filter Length 212 m sec
 Gate Length 2200 m sec
 No of Gates/Trace 2
 Initial Times, Gate No: -
 Tr1 1.2 sec, Tr 2 4.0 sec
 Final Times, Gate No: -
 Tr 1 0.8 sec, Tr 1 1.2 sec
 Tr 1 4.5 sec, Tr 2 3.76 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes Diversity Stack NO
 First Break Suppression
 T₁ 0 sec T₂ 1.0 sec
 T₃ 0.5 sec T₄ 1.2 sec
 T₅ 0.8 sec T₆ 1.4 sec

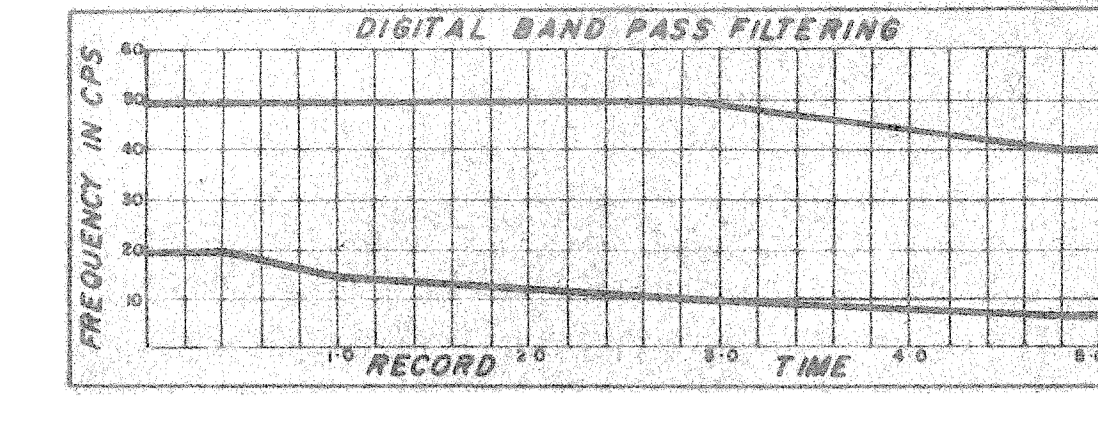

DISPLAY		REQ N°	L-3842
Analog Filters OUT-OUT		Section N°	2033-C
Straight Gain		System Code	MSTV-2
+18 +0 -14 +4		Assembled by	V. GEADA
Tape HTL 2133		Checked by	K. NECH

