


**SHOOTING PARAMETERS**  
 6-Fold Off End  
 Shot by GSI PTY 903  
 Cable Length 1600 m  
 Group Interval 67 m  
 Shot Point Interval 134 m  
 Average Shot Offset 160 m  
 Charge Size 33 1/3 lb  
 Average Sens Depth 15 m

**RECORDING PARAMETERS**  
 System 10,000  
 Record Length 5 0  
 Sample 2 ms  
 GAGC Trip 0.87 Rate 80db/s  
 Initial Rate 45 db/sect  
 Filters Hi 70 cps 24 db/sect  
 Lo 12 cps 12 db/sect  
 2ms Anti Alias Filtering

**SEIS. EDIT & NMO**  
 TAR  
 $\alpha = 1.9$  C db/sec  
 From 0 sec to 4 0 sec  
 Water Velocity 1524 mps  
 Replacement Vel 1524 mps

**DECONVOLUTION**  
 Time Varying ARD I  
 Filter Length 212 msec  
 Gate Length 2200 msec  
 No of Gates/Trace 2  
 Initial Times, Gate No 1 :-  
 Tr 1: 2 sec, Tr 2: 4 0 46 sec  
 Final Times, Gate No 2 :-  
 Tr 1: 4 5 sec, Tr 2: 4 5 76 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes Diversity Stack NO  
 First Break Suppression  
 T<sub>1</sub> 0 sec T<sub>2</sub> 1 0 sec  
 T<sub>3</sub> 0 6 sec T<sub>4</sub> 1 2 sec  
 T<sub>5</sub> 0 8 sec T<sub>6</sub> 1 4 sec

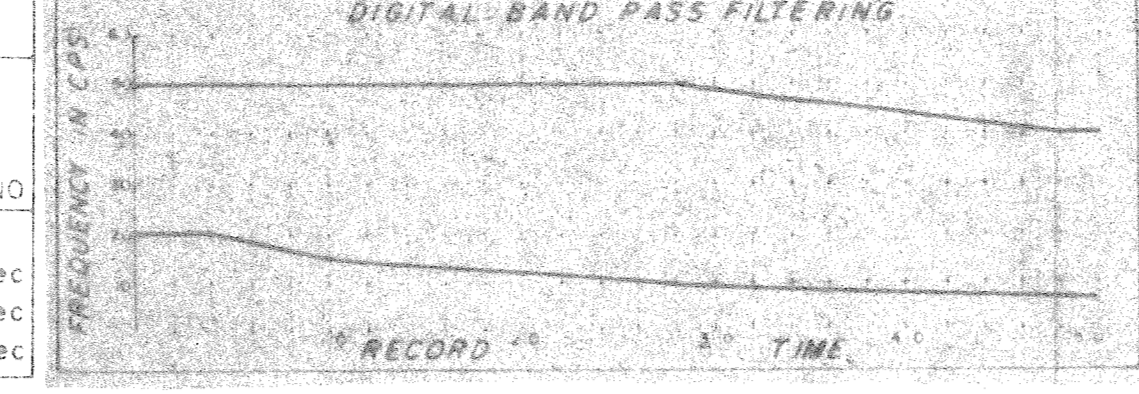

DISPLAY		REQ. N°	L-3785
Analog Filters OUT-OUT		Section N°	2032-C
Straight Gate		System Code	MSTV 2
+ 12 - 0 - 18 = - 6		Assembled by	V. GEADA
Tape HTL 2102		Checked by	

