


SHOT/TRACE PARAMETERS
 Shot by G.S. P14 4-3
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 160 m
 Average S/N 33.1/3
 Average Sea State 2 m

RECORDING PARAMETERS
 System 10,000
 Record Length 5.0
 Sample 2 ms
 GAGC Trip 0.47 Rate 8000
 Imp 45 db/m 100 db
 Filters H 7.5 cps 64 db/oct
 L 12 cps 12 db/oct
 Dig Amp Auto Filtering

SET POINT & WIND
 T.A. 4
 S 4.0 db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1524 mps
 Replacement Vel 1524 mps

DECONVOLUTION
 Time varying ARD 1
 Filter Length 212 msec
 Rate Length 2200 msec
 No. of Gates Trace 2
 Initial Times Gate NO 1
 Tr1 2 sec, Tr 240.46 sec
 Final Times Gate NO 2
 Tr1 4 sec, Tr 24.376 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes Diversity Stack No
 First Break Suppression
 T₁ 0 sec T₂ 1.0 sec
 T₃ 0.6 sec T₄ 1.2 sec
 T₅ 0.8 sec T₆ 4 sec

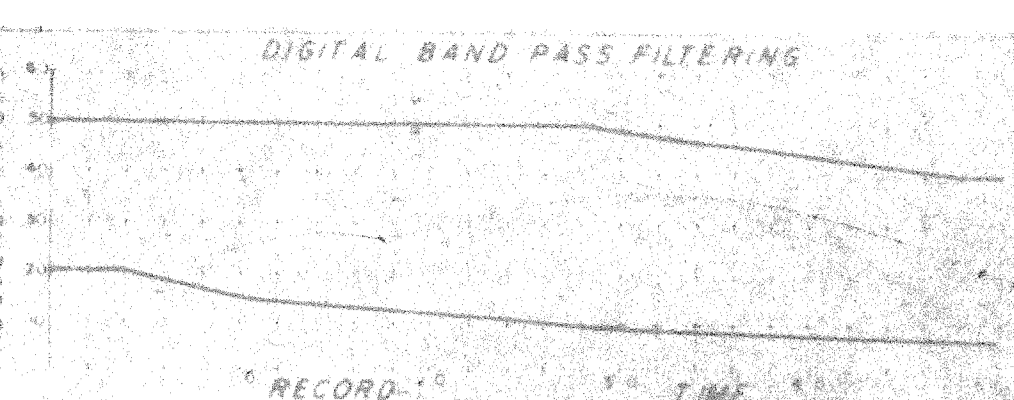

D'SPLAY
 Analog Filters OUT-GUT
 Strength Gain
 +12 +0 -22 + -10
 Tape HTL 2102
 REQ N° L-3284
 Section N° 2031-C
 System Code MSTV 2
 Assembled by V. BEADA
 Checked by [Signature]

LINE B 441
 SRK 5720

