


SHOOTING PARAMETERS
6-Fold Off End
Shot by GS: PTY 903
Cable Length 1600 m
Group Interval 67 m
Shot Point Interval 134 m
Average Shot Offset 150 m
Charge Size 33 1/3 lb
Average Sea Depth 15 m

RECORDING PARAMETERS
System 10,000
Record Length 5.0
Sample 2 ms
GAGC Trip Out Rate 80 db/sec
Int 4.5 db/100 ft
Filters Hi 70 cps 24 db/oct
Lo 12 cps 12 db/oct
2ms Anti-Alias Filtering

SEIS EDIT @ NMO
TAR
a = 4.0 db/sec
From 0 sec to 4.0 sec
Water Velocity 1524 mps
Replacement Vel 1524 mps

DECONVOLUTION
Time Varying ARD 1
Filter Length 212 msec
Gate Length 2200 msec
No of Gates/Trace 2
Initial Times Gate No 1
Tr 1 2 sec, Tr 2 4.6 sec
Final Times Gate No 2
Tr 1 3.5 sec, Tr 2 3.76 sec

6-FOLD STACK
Optimum Wide Band Stack
RNMO Yes Diversity Stack No
First Break Suppression
T₁ 0 sec T₂ 1.0 sec
T₃ 0.6 sec T₄ 1.2 sec
T₅ 0.8 sec T₆ 1.4 sec

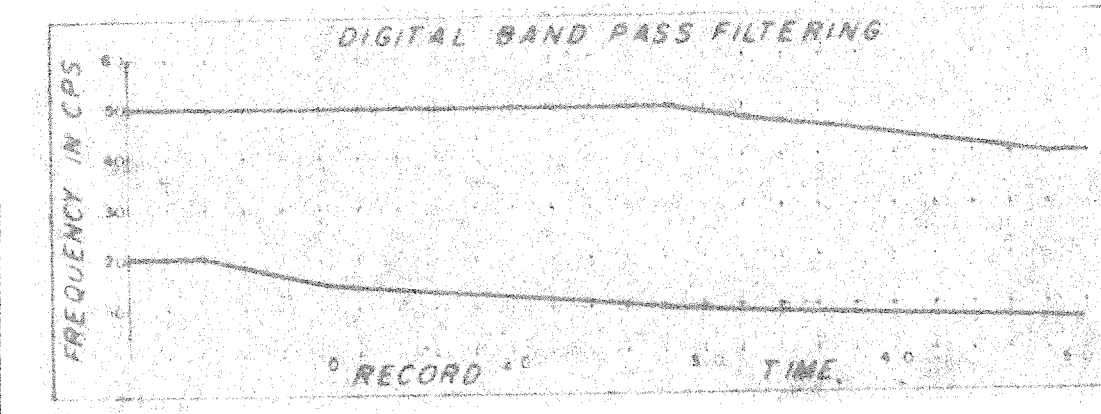

DISPLAY	REQ. N°	L-3739
Analog Filters OUT-OUT	Section N°	2029-C
Stretch Gain + 12 - 0 - 10 : 1 : 2	System Code	MSTV 2
Tape HTL 2102	Assembled by	V. GEADA
	Checked by	[Signature]

