


**SHOOTING PARAMETERS**  
 12-Fold Off End  
 Shot by C.S.I. PTY 906  
 Cable Length 2400 m  
 Group Interval 100 m  
 Shot Point Interval 100 m  
 Average Shot Offset 200m  
 Charge Size 50 lb  
 Average seis. Depth 47

**RECORDING PARAMETERS**  
 System 9000  
 Record Length 5-0  
 Sample 2 ms  
 GAGC Trip 0.47s Rate 80db/s  
 Int. 36 db Final 100db  
 Filters Hi 75cps 24db/oct  
 Lo 8cps 24db/oct  
 2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
 TAR  
 ec 4-0 db/sec  
 From 0 sec to 4-0sec  
 Water Velocity 1522 mps  
 Replacement Vel. 1522 mps

**DECONVOLUTION**  
 Time Invariant ARD I  
 Filter Length 252 msec  
 Gate Length 2600 sec  
 No of Gates/Trace 1  
 Initial Times, Gate No 1 :-  
 Tr 1 185sec, Tr 2 0-47sec  
 Final Times, Gate No 1 :-  
 Tr 1 3-45sec, Tr 2 3-07sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes, Diversity Stack Yes  
 First Break Suppression  
 T<sub>1</sub> 0-2 sec T<sub>2</sub> 1-4 sec  
 T<sub>3</sub> 0-8 sec T<sub>4</sub> 1-6 sec  
 T<sub>5</sub> 1-0 sec T<sub>6</sub> 1-8 sec

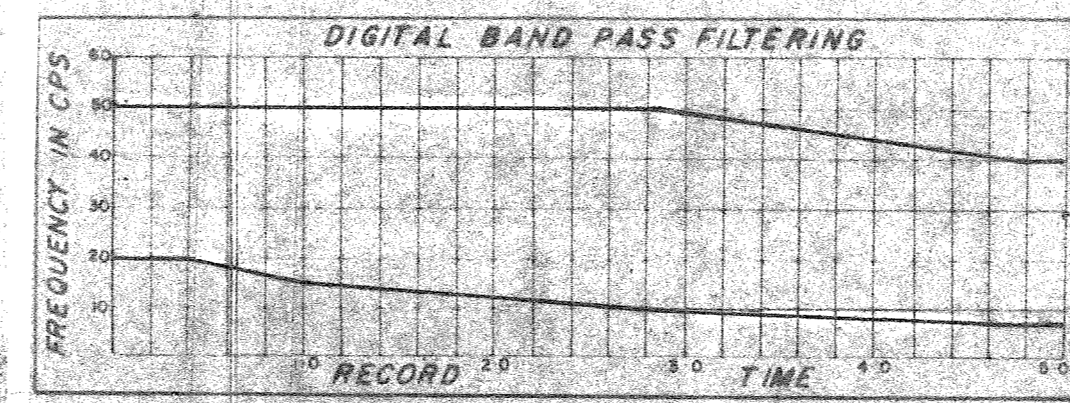

**DISPLAY**  
 Single Coverage  
 Analog Filters OUT-OUT  
 Straight Gain +24 +0 -22 = +2  
 Tapes HTL 1012  
 HTL

REQ. N° L-3181  
 Section N° 1000C  
 System Code MSTV-2  
 Assembled by *L.H.*  
 Checked by *mc*

LINE

