


SHOOTING PARAMETERS
 12-Fold Off End
 Shot by GS I PTY 906
 Cable Length 2400 m
 Group Interval 100 m
 Shot Point Interval 100 m
 Average Shot Offset 200 m
 Charge Size 50 lb
 Average Seis Depth 17 m

RECORDING PARAMETERS
 System 9000
 Record Length 50
 Sample 2 ms
 GAGC Trip 0.47s Rate 80db/s
 Int 36 db Final 100db
 Filters Hi 75 cps 24db/oct
 Lo 6 cps 24db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 4.0 db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1522 m/s
 Replacement Vel 1522 m/s

DECONVOLUTION
 Time variant ARD I
 Filter Length 0.212 sec
 Gate Length 5.30 sec
 No of Gates/Trace 2
 Initial Times Gate No 1
 Tr 1 1.7 sec, Tr 2 4.0-4.5 sec
 Final Times Gate No 1
 Tr 1 5.0 sec, Tr 2 3.758 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes Diversity Stack Yes
 First Break Suppression
 T₁ 0.2 sec T₂ 1.4 sec
 T₃ 0.8 sec T₄ 1.6 sec
 T₅ 1.2 sec T₆ 1.8 sec

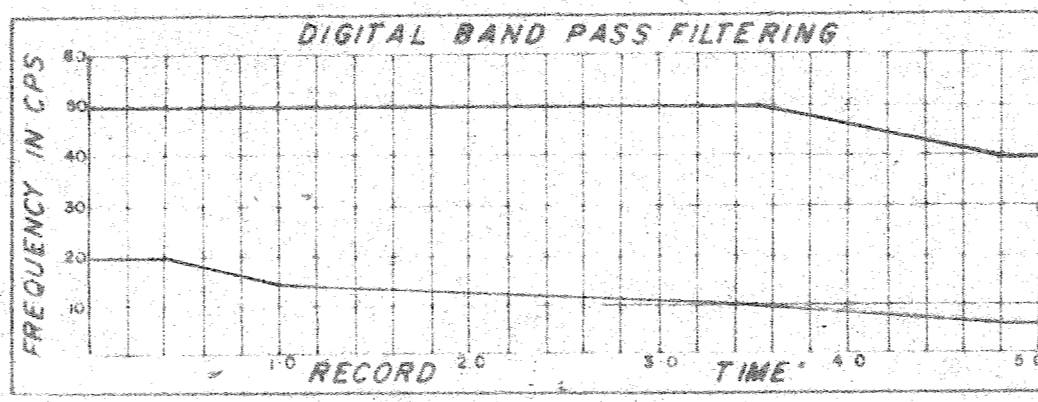

DISPLAY
 Single Coverage
 Analog Filters OUT-OUT
 Straight Gain
 +18 + 0 - 8 = 410
 Tapes HTL 1012
 HTL

REQ N°	L-3246
Section N°	1002C
System Code	MSTV
Assembled by	HH
Checked by	HC

Meters 43 43 51 61 67 76 82 86 90 95 100 104 107 110 Meters
 2968 2970 2990 3010 3030 3050 3070 3090 3110 3130 3150 3170 3190 3206

