

**SHOOTING PARAMETERS**  
 12-Fold, Off-End  
 Shot by G.S.I. Ply. 906  
 Cable Length 2400m  
 Group Interval 100m  
 Shot Point Interval 100m  
 Average Shot Offset 56m  
 Charge Size 50m  
 Average Seis. Depth 50 m


**RECORDING PARAMETERS**  
 System 9000  
 Record Length 5.0 sec  
 Sample 2ms  
 GAGC Trip 64s, Rate 60db/s  
 with 46db, Final 100db  
 Filters: Hi 75cps 24db/oct  
 Lo 8cps 24db/oct  
 2 ms Anti-Alias Filtering

**SEIS EDIT & NMO**  
 TAR Applied  
 4.0 db/sec 0-4.0sec  
 Equalization 2.5-4.0sec  
 Water Velocity 1524 m/sec  
 Replacement Vel 1524 m/sec

**DECONVOLUTION**  
 Time Invariant ARD 1  
 Filter Length 252msec  
 Gate Length 260msec  
 No. of Gates/Trace 1  
 Initial times, Gate No. 1-  
 Tr. 1: 0.8 sec, Tr. 2: 0.42 sec  
 Final times, Gate No. -  
 Tr. 1: 4.4 sec, Tr. 2: 3.02 sec

**12-FOLD STACK**  
 First Break Suppression  
 Tr. 0 sec, Tr. 1: 1.8 sec  
 Tr. 0.2 sec, Tr. 1: 1.8 sec  
 Tr. 0.5 sec, Tr. 1: 2.0 sec  
 Tr. 1.0 sec, Tr. 1: 2.1 sec  
 Tr. 1.2 sec, Tr. 1: 2.2 sec  
 Tr. 1.4 sec, Tr. 1: 2.3 sec  
 Tr. 1.4 sec, Tr. 1: 2.4 sec  
 Equalization 0.8-4.0 sec

**DIGITAL FILTERING**  
 Time Varying YES  
 Filter Length 136 ms  
 O/P Sample Period 2ms  
 O/P Record Length 5sec

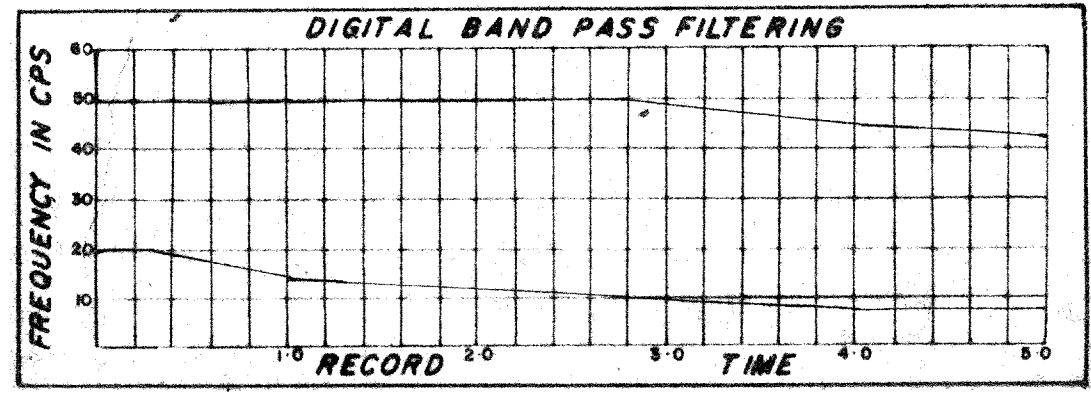

**DISPLAY**  
 Single Coverage  
 Analog Filters OUT-OUT  
 Straight Gain in db  
 +12 +2 -20 -6  
 Tape HTL-3019

REQ. N° L-3369  
 System Code MEDS-3  
 Section N° 3002 C  
 Assembled by *Adkins*  
 Checked by *SGE*

LINE 8443 S.P. 1956  
 SB 9805.5  
 135 134 134 134 135 135 134 130 123 123 137 143 143  
 Meters 150 150 3505 3510 3530 3550 3570 3590 3610 3630 3650 3670 3690 3710 3730 3750 3770 3783

