


SHOOTING PARAMETERS
 12-Fold Off End
 Shot by SSI PTY 906
 Cable Length 2400 m
 Group Interval 100 m
 Shot Point Interval 100 m
 Average Shot Offset 60m
 Charge Size 50 lb
 Average Sea Depth 15 m

RECORDING PARAMETERS
 System 9000
 Record Length 50
 Sample 2ms
 GAGC Trip 0.78 s Rate 80db/s
 Int 43 db Final 100db
 Filters Hi 75 cps 24db/oct
 Lo 8 cps 24db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 4.0 db/sec
 From 0 sec to 4.2 sec
 Water Velocity 1522 mps
 Replacement Vel 1522 mps

DECONVOLUTION
 Time invariant ARD I
 Filter Length 0.252 sec
 Gate Length 2.6 sec
 No of Gates/Trace 1
 Initial times, Gate No 1
 Tr1 1.7 sec, Tr 240-458 sec
 Final times, Gate No 1
 Tr1 4.3 sec, Tr 24.3058 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes, Diversity Stack Yes
 First Break Suppression
 T₁ 0 sec T₂ 1.2 sec
 T₃ 0.6 sec T₄ 1.4 sec
 T₅ 1.0 sec T₆ 1.6 sec

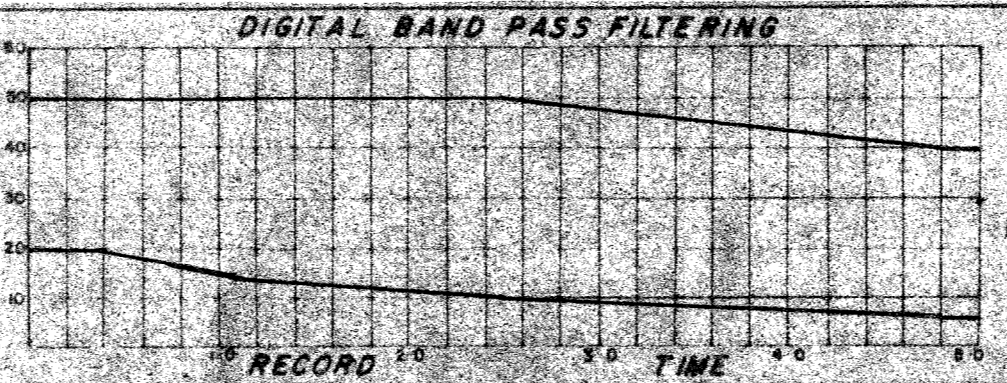

DISPLAY
 Analog Filters OUT-OUT
 Straight Gate
 +18 +0 -16 + +2
 Tapes HTL 1065
 HTL

DECONVOLUTION
 Time variant ARD I
 Filter Length 2.6 m sec
 Gate Length 2.6 m sec
 No of Gates/Trace 1
 Initial times, Gate No 1
 Tr1 1.7 sec, Tr 24.0504 sec
 Final times, Gate No 1
 Tr1 4.3 sec, Tr 24.3058 sec

REQ. N° L-3738
 Section N° 1028 C
 System Code MSTV-2
 Assembled by M.A. P. Co.
 Checked by

60 62 Meters 71 79 84 89 96 103 108 111 115 131 139 148 Meters 155 156
 9137 9140 9160 9180 9200 9220 9240 9260 9280 9300 9320 9340 9360 9380 9400 9409
 LINE B 441 S.P. 8096
 LINE B 442 S.P. 260

