


SHOOTING PARAMETERS	
12-Fold Off End	
Shot by G.S.I. PTY 906	
Cable Length 2400 m	
Group Interval 100 m	
Shot Point Interval 100 m	
Average Shot Offset 4.0m	
Charge Size 50 lb	
Average Seis. Depth 15 m	

RECORDING PARAMETERS	
System 9000	
Record Length 5-0	
Sample 2ms	
GAGC Trip 46 Rate 80db/s	
Init 76 db/Final 100db	
Filters Hi 75 cps 24db/oct	
Lo 8cps 24db/oct	
2ms Anti Alias Filtering	

SEIS EDIT & NMO	
TAR	
sec 4.0 db/sec	
From 0 sec to 4.0 sec	
Water Velocity 1522 m.p.s	
Replacement Vel 1522 m.p.s	

DECONVOLUTION	
Time Invariant ARD I	
Filter Length 0.252 sec	
Gate Length 2.6 sec	
No of Gates/Trace 1	
Initial times, Gate No 1 :-	
Tr1 1.7 sec, Tr2 4.504 sec	
Final times, Gate No 1 :-	
Tr1 4.3 sec, Tr2 3.104 sec	

6-FOLD STACK	
Optimum Wide Band Stack	
RNMO Yes, Diversity Stack Yes	
First Break Suppression	
T ₁ 0 sec T ₂ 1.4 sec	
T ₃ 0.8 sec T ₄ 1.6 sec	
T ₅ 1.2 sec T ₆ 1.8 sec	

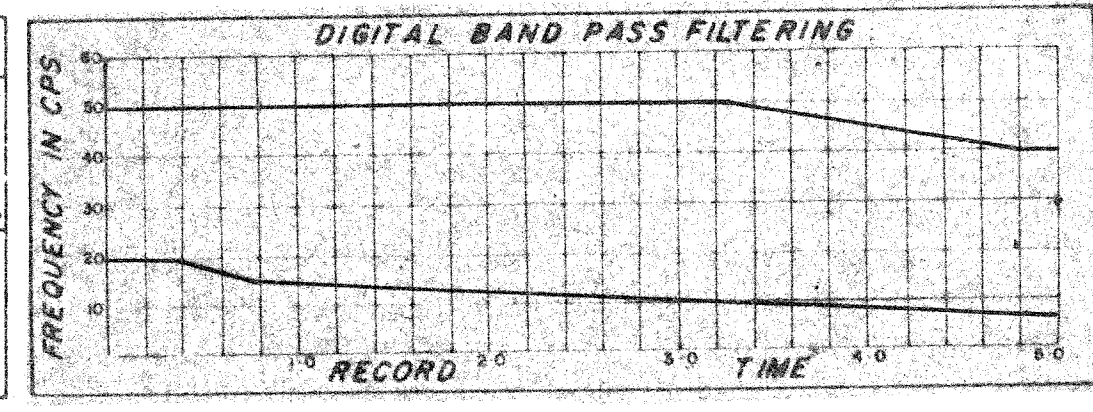

DISPLAY		REQ. N°	L-3827
Single Coverage		Section N°	1036 C
Analog Filters OUT-OUT		System Code	MSTV 2
Straight Gain		Assembled by	R.P.A.
+18+0 -20=-2		Checked by	R.F.
Tapes HTL 1082			
HTL			

