


SHOOTING PARAMETERS
 12-Fold Off End
 Shot by G.S.I. PTY 906
 Cable Length 2400 m
 Group Interval 100 m
 Shot Point Interval 100 m
 Average Shot Offset 109 m
 Charge Size 50 lb
 Average Seis. Depth 15 m

RECORDING PARAMETERS
 System 9000
 Record Length 5-0
 Sample 2ms
 GAGC Trip 0.78 Rate 80db/s
 Int. 43 db Final 100db
 Filters Hi 75 cps 24db/oct
 Lo 8cps 24db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 sec 4.0 db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1522 m/sec
 Replacement Vel 1522 m/sec

DECONVOLUTION
 Time Variant ARD
 Filter Length 220 msec
 Gate Length 2200 msec
 No of Gates/Trace 2
 Initial times, Gate No 1 :-
 Tr1 1.7 sec, Tr 24.504 sec
 Final times, Gate No 2 :-
 Tr1 5.0 sec, Tr 24.3804 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes Diversity Stack Yes
 First Break Suppression
 T₁ 0 sec T₂ 1.2 sec
 T₃ 0.6 sec T₄ 1.4 sec
 T₅ 1.0 sec T₆ 1.6 sec

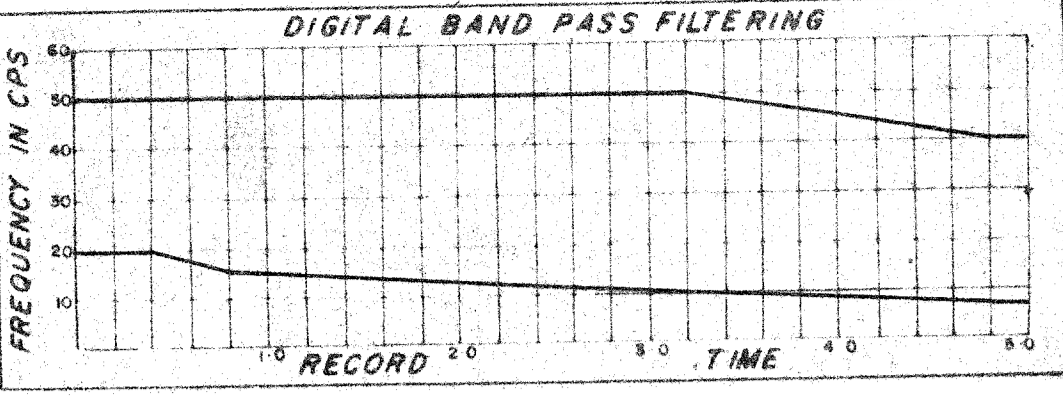

DISPLAY
 Analog Filters OUT-OUT
 Straight Gain +24 +4 -20 + +8
 Tapes HTL 1065
 HTL

REQ N° L- 3776
 Section N° 1033-C
 System Code MSTV-2
 Assembled by S.A.M.
 Checked by P.E.

1 NE.

