


**SHOOTING PARAMETERS**  
 12-Fold Off End  
 Shot by GS1 PTY 906  
 Cable Length 2400 m  
 Group Interval 100 m  
 Shot Point Interval 100 m  
 Average Shot Offset 200m  
 Charge Size 50 lb  
 Average Sea Depth 15 m

**RECORDING PARAMETERS**  
 System 9000  
 Record Length 5-0  
 Sample 2ms  
 GAGC Trip 43 Rate 50db/s  
 Init. 78 db/Final 100db  
 Filters Hi 75 cps 24db/oct  
 Lo 8 cps 24db/oct  
 2ms Anti Alias Filtering

**SEIS EDIT & NMQ**  
 TAR  
 ac 4-0 db/sec  
 From 0 sec to 4-0sec  
 Water Velocity 1522 m/s  
 Replacement Vel 1522 m/s

**DECONVOLUTION**  
 Time in/orient ARD I  
 Filter Length 252 sec  
 Gate Length 2-6 sec  
 No of Gates/Trace 1  
 Initial times, Gate No 1 :-  
 Tr 1 1-7 sec, Tr 24 -504sec  
 Final times, Gate No 1 :-  
 Tr 1 4-3sec, Tr 24 3-104sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes, Diversity Stack Yes  
 First Break Suppression  
 T<sub>1</sub> 0 sec T<sub>4</sub> 1-6 sec  
 T<sub>2</sub> 1-0 sec T<sub>3</sub> 1-8 sec  
 T<sub>5</sub> 1-4 sec T<sub>6</sub> 2-0 sec

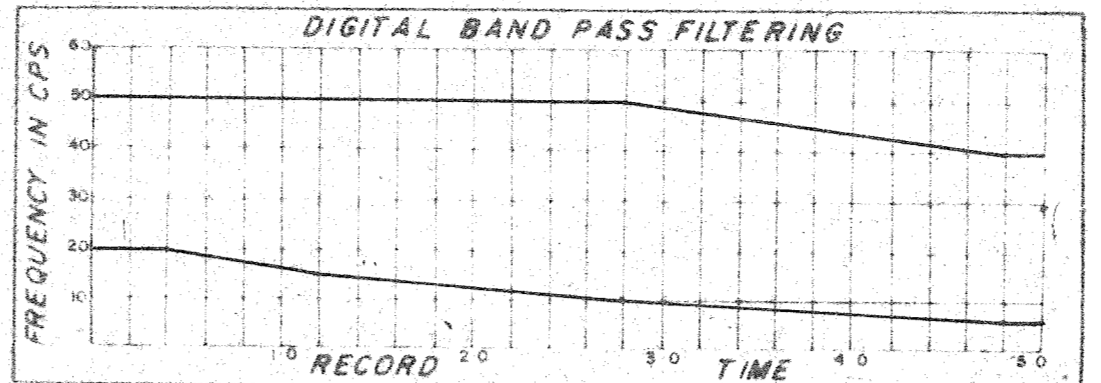

<b>DISPLAY</b>		REQ. N°	L-3825	
Single Coverage	Analog Filters	OUT-OUT	Section N°	1037 C
Straight Gain		+18 + 0 - 20 = - 2	System Code	MSTV-2
Tapes HTL 1082		Assembled by		<i>A. D. B.</i>
HTL		Checked by		

98 Meters 100 104 108 112 115 118 123 126 132 138 141 Meters 143 143  
 11570 11560 11540 11520 11500 11480 11460 11440 11420 11400 11380 11360 11340 11332

