

SHOOTING PARAMETERS

12-Fold, Off-End
 Shot by G.S.I. Ply 906
 Cable Length 2400m
 Group Interval 100m
 Shot Point Interval 100m
 Average Shot Offset 96m
 Charge Size 90lb
 Average Seis Depth 13 m

RECORDING PARAMETERS

System 9006
 Record Length 5.0 sec
 Sample 2 ms
 GAGC Trip 78's Rate 80 db/dec
 Filters Hi 75 cps 24 db/oct
 Lo 8 cps 24 db/oct
 2 ms Anti-Alias Filtering

SEIS EDIT & NMO

TAR Applied
 Equalization 2.0 - 4.5 sec
 Water Velocity 1524 m/sec
 Replacement Vel 1524 m/sec

DECONVOLUTION


Time Invariant ARD 1
 Filter Length 250 msec
 Gate Length 250 msec
 No. of Gates / Trace 1
 Initial Times, Gate No. 1
 Tr 1: 1.8 sec, Tr 2: 2.0 sec
 Tr 3: 2.2 sec, Tr 4: 2.4 sec

12-FOLD STACK

First Break Suppression
 0.0 sec to 1.6 sec
 0.2 sec to 1.6 sec
 0.8 sec to 2.0 sec
 1.0 sec to 2.1 sec
 1.2 sec to 2.2 sec
 1.4 sec to 2.3 sec
 2.4 sec
 Equalization 0.8 - 4.0 sec

DIGITAL FILTERING

Time Varying YES
 Filter Length 136 ms
 O/P Sample Period 4 ms
 O/P Record Length 5 sec

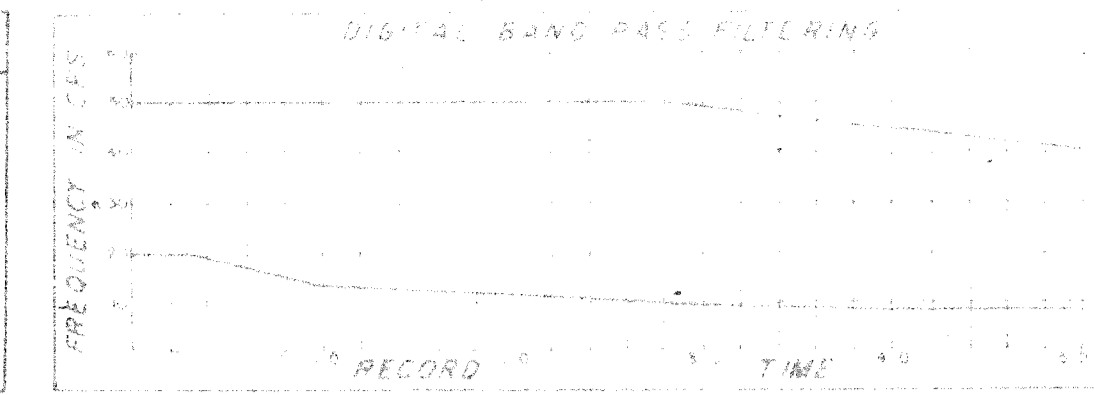

DISPLAY	REQ N°	L-4002
Analog Filters Out-Out Straight Gate in db 12 + 4 22 - 6	System Code	MEDS-3
Tape 41L-3048	Section N°	3027 C
	Assembled by	G. Ross
	Checked by	M. J. ...

LINE 447
 SP 14930

Meters 124 126 126 126 130 33 38 39 141 141 142 142 140 140

13916 13920 13934 10470 10490 10510 10530 10550 10570 10590 10610 10630 10650 10662

