


SHOOTING PARAMETERS
12-Fold Off End
Shot by G.S.I. PTY 906
Cable Length 2400 m
Group Interval 100 m
Shot Point Interval 100 m
Average Shot Offset 100m
Charge Size 50 lb
Average Seis Depth 13 m

RECORDING PARAMETERS
System 9000
Record Length 50
Sample 2 ms
CAGC Trip 0.78 Rate 80db/s
Net 46 db Freq 100db
Filters Hi 75 cps 24db/oct
Lo 8 cps 24db/oct
2ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
wd 40 db/sec
From 0 sec to 4.0 sec
Water Velocity 1522 mps
Replacement Vel 1522 mps

DECONVOLUTION
Time variant ARD
Filter Length 220 msec
Gate Length 2200 msec
No of Gates/Trace 2
Initial times, Gate No 1
Tr1: 7 sec, Tr 2: 40-504 sec
Final times, Gate No 2
Tr1: 5.0 sec, Tr 2: 4.3804 sec

6-FOLD STACK
Optimum Wide Band Stack
RNMO Yes, Diversity Stack Yes
First Break Suppression
T₁: 0 sec T₂: 1.2 sec
T₃: 0.6 sec T₄: 1.4 sec
T₅: 1.0 sec T₆: 1.6 sec

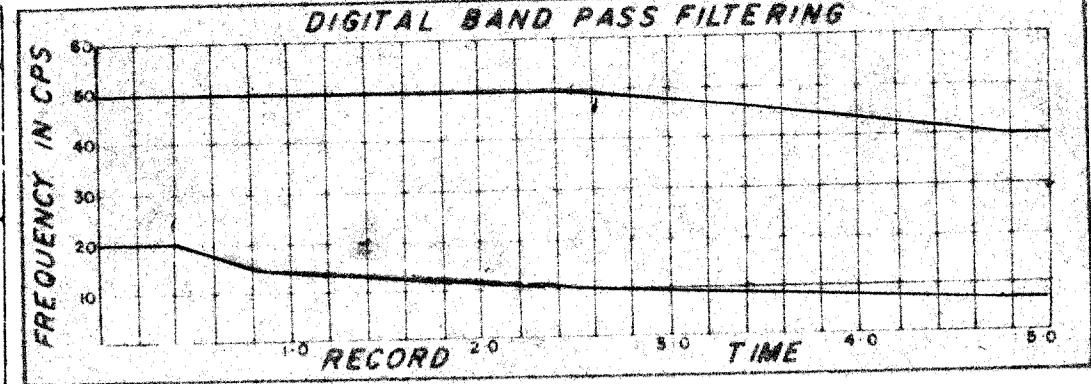

DISPLAY
Analog Filters OUT-OUT
Straight Gain
+24 +0 -18 + +6
Tapes HTL 1065
HTL

REQ. N° L-3737
Section N° 1031-C
System Code MSTV-2
Assembled by S.A.M.
Checked by P.E.

N.E.

20 Meters 39 52 64 72 78 83 88 92 96 99 103 106 Meters
13510 13530 13550 13570 13590 13610 13630 13650 13670 13690 13710 13730 13750 13757

