


**SHOOTING PARAMETERS**  
 12-Fold Off End  
 Shot by G.S.I. PTY 906  
 Cable Length 1600 m  
 Group Interval 67 m  
 Shot Point Interval 134 m  
 Average Shot Offset 160 m  
 Charge Size 50 lb  
 Average Seis. Depth 12 m

**RECORDING PARAMETERS**  
 System 9000  
 Record Length 5.0  
 Sample 2 ms  
 GAGC Trio 0.78 Rate 80db/s  
 Init. 46 db/Final 100db  
 Filters Hi 75 cps 24db/oct  
 Lo 8cps 24db/oct  
 2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
**TAR**  
 4.0 db/sec  
 From 0 sec to 4.0 sec  
 Water Velocity 1522 mps  
 Replacement Vel. 1522 mps

**DECONVOLUTION**  
 Time Variant ARD I  
 Filter Length 220 sec  
 Gate Length 2.2 sec  
 No of Gates/Trace 2  
 Initial Times, Gate No 1 :-  
 Tr 11.50 sec, Tr 24.488 sec  
 Final times, Gate No 2 :-  
 Tr 14.8 sec, Tr 24.3788 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes, Diversity Stack Yes  
 First Break Suppression  
 T<sub>1</sub> 0 sec T<sub>2</sub> 1.2 sec  
 T<sub>3</sub> 0.6 sec T<sub>4</sub> 1.4 sec  
 T<sub>5</sub> 1.0 sec T<sub>6</sub> 1.6 sec

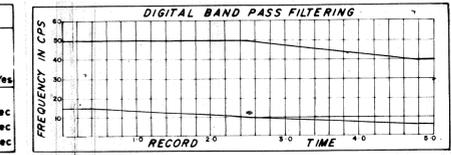

<b>DISPLAY</b>		<b>REQ. N°</b>	<b>L-3948</b>
Analog Filters OUT-OUT		<b>Section N°</b>	<b>1044 C</b>
Straight Gain +18 +4 -20 +2		<b>System Code</b>	<b>MSTV-2</b>
Tapes HTL 1102 HTL		<b>Assembled by</b>	
		<b>Checked by</b>	✓

