


**SHOOTING PARAMETERS**  
 6-Fold Off End  
 Shot by G.S.I. PTY 906  
 Cable Length 1600 m  
 Group Interval 67 m  
 Shot Point Interval 134 m  
 Average Shot Offset 117 m  
 Charge Size 50 lb  
 Average Seis. Depth 11 m

**RECORDING PARAMETERS**  
 System 9000  
 Record Length 5-0  
 Sample 2 ms  
 GAGC Trip 0.78 Rate 8000  
 Wt 46 @ Final 10000  
 Filters Hi 75 cps 24db/oct  
 Lo 8 cps 24db/oct  
 2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
 TAR  
 sc 4-0 db/sec  
 From 0 sec to 4-2 sec  
 Water Velocity 1522 m/s  
 Replacement Vel 1522 m/s

**DECONVOLUTION**  
 Time invariant ARD I  
 Filter Length 0-252 sec  
 Gate Length 2-6 sec  
 No of Gates/Trace 1  
 Initial times, Gate No 1 :-  
 Tr 1 1-5 sec, Tr 2 4-0-488 sec  
 Final times, Gate No 1 :-  
 Tr 1 4-1 sec, Tr 2 4-3-088 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes, Diversity Stack Yes  
 First Break Suppression  
 T<sub>1</sub> 0 sec T<sub>2</sub> 1-2 sec  
 T<sub>3</sub> 0-6 sec T<sub>4</sub> 1-4 sec  
 T<sub>5</sub> 1-0 sec T<sub>6</sub> 1-6 sec

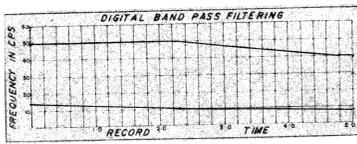

**DISPLAY**  
 Analog Filters OUT-OUT  
 Straight Gate  
 + 12 + 0 - 12 = - 0  
 Tapes HTL 1115  
 WTL

REG. N° L-4007  
 Section N° 1047 C  
 System Code MSTV-2  
 Assembled by M.A. [Signature]  
 Checked by [Signature]

