


**SHOOTING PARAMETERS**  
12-Fold Off End  
Shot by G.S.I. PTY 906  
Cable Length 2400 m  
Group Interval 17.0 m  
Shot Point Interval 10.0 m  
Average Shot Offset 17.0 m  
Charge Size 30 lb  
Average Seis. Depth 12 m

**RECORDING PARAMETERS**  
System 9070  
Reel Length 50  
Sensors 2ms  
3000 Traces/78 Rate 8000/s  
Bit 4.000-10.000  
Filters Hi 75 cps 20db/oct  
Lo 8 cps 24db/oct  
2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
TAR  
Water Velocity 1522 mps  
Replacement Vel 1522 mps

**DECONVOLUTION**  
Time Variant ARD T  
Filter Length 220 sec  
Gate Length 2.2 sec  
No of Velocity Traces 2  
Initial Times Gate No 1  
Tr 1 1.5 sec, Tr 2 0.488 sec  
Final Times Gate No 2  
Tr 1 4.8 sec, Tr 2 3.789 sec

**8-FOLD STACK**  
Gaussian Wide Band Stack  
RNMO Yes Overlay Stack Yes  
First Break Suppression  
T 0.6 sec T<sub>1</sub> 1.2 sec  
T<sub>2</sub> 0.6 sec T<sub>3</sub> 1.4 sec  
T<sub>4</sub> 1.0 sec T<sub>5</sub> 1.6 sec

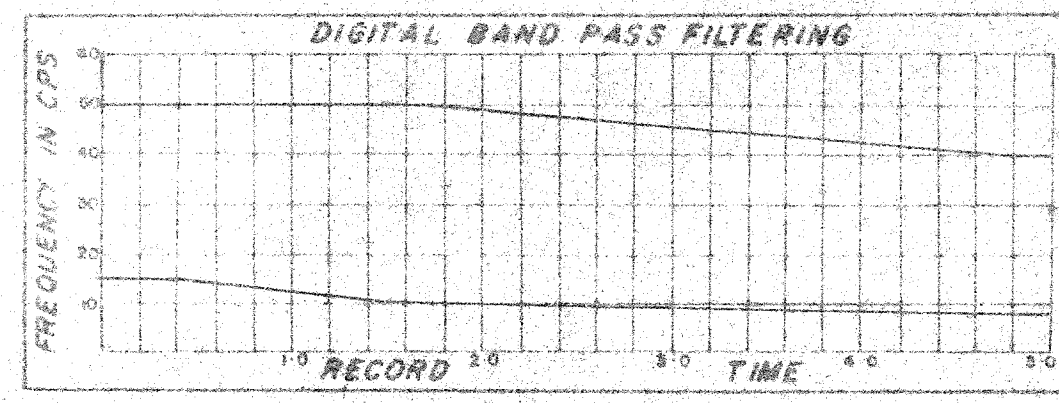

Display	REG N°	L-3901
Amplitude Filter	Section N°	1041 C
Storage Gate	System Code	M 1.1
18 - 2 - 14 - 16	Assembled by	
Tapes HTL 1092	Checked by	
HTL		

