


SHOOTING PARAMETERS
 Fold Off End
 Shot by G.S.I. P13 906
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 164 m
 Average Shot Offset 160 m
 Charge Size 50 lb
 Average Sea Depth 14 m

RECORDING PARAMETERS
 System 10,000
 Record Length 5.0 sec
 Sample 2 ms
 GAGC Trip 78 Rate 80 db/s
 Inr 40 db Final 100 db
 Filters H. 75 cps 24 db/oct
 Lc. B cps 24 db/oct
 2ms Ant Alias Filtering

SEIS EDIT & NMO
 Tilt 0.0 db/ft
 From 0 sec to 3.1 sec
 Water Velocity 1502 m/s
 Replacement Vel 1522 m/s

DECONVOLUTION
 Filter Length 0.22 sec
 Gate Length 2.2 sec
 NP 1 Gates Cross 2
 NP 1 Gates Side 2
 Y: 1.5 sec, X: 10.488 sec
 Roll Pass 0.2 sec
 4.8 sec, 3.728 sec

5 FOLD STACK
 Common Wide Band Stack
 NMO Gas Diversity 20% (vs)
 First Break Subtraction
 0 sec, 1.14 sec
 0.8 sec, 1.16 sec
 1.12 sec, 1.18 sec

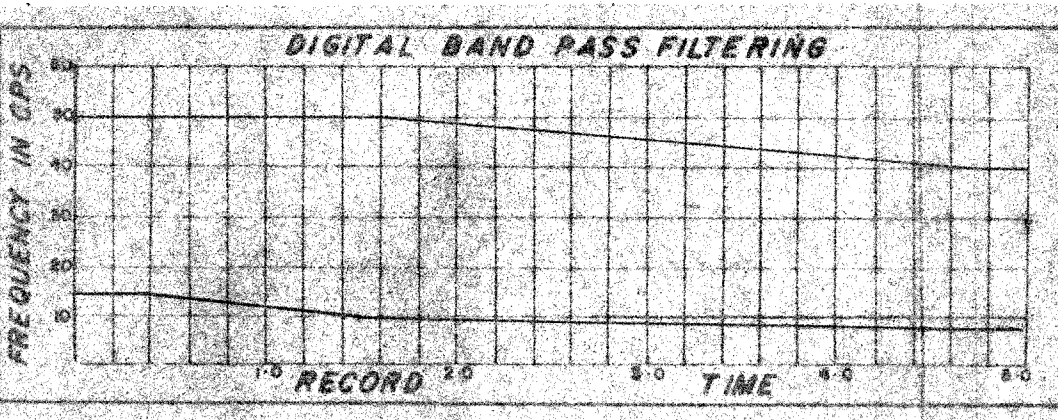

DISPLAY
 Analog Filters OUT-GUT
 Straight Gain 18 2 20 0
 Tapes HT: 1092
 HT:

REQ. N° L-3918
 Section N° 1042-C
 System Code MSTV 2
 Assembled by
 Checked by

A.N.E.

84 Meters 84 81 86 92 99 97 Meters 101
 456 450 430 410 390 370 350 330

