


SHOOTING PARAMETERS
6-Fold Off End
Shot by GS1 PTY 906
Cable Length 1600 m
Group Interval 67 m
Shot Point Interval 133 m
Average Shot Offset 134 m
Charge Size 50 lb
Average Seis. Depth 10 m

RECORDING PARAMETERS
System 9000
Record Length 5.0
Sample 2ms
GAGC Trip 0.78s Rate 80db/s
Intr. 4.3 db Final 100db
Filters Hi 75 cps 24db/oct
Lo 8 cps 24db/oct
2ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
4.0 db/sec
From 0 sec to 4.0 sec
Water Velocity 1522 mps
Replacement Val. 1522 mps

DECONVOLUTION
Time invariant ARD I
Filter Length 2600 msec
Gate Length 252 sec
No of Gates/Trace 1
Initial times, Gate No 1
Tr1: 5 sec, Tr2: 40388 sec
Final times, Gate No 1
Tr1: 4.1 sec, Tr2: 43088 sec

6-FOLD STACK
Optimum Wide Band Stack
RNMO Yes, Diversity Stack Yes
First Break Suppression
T₁: 0 sec T₂: 1.0 sec
T₃: 0.6 sec T₄: 1.2 sec
T₅: 0.8 sec T₆: 1.4 sec

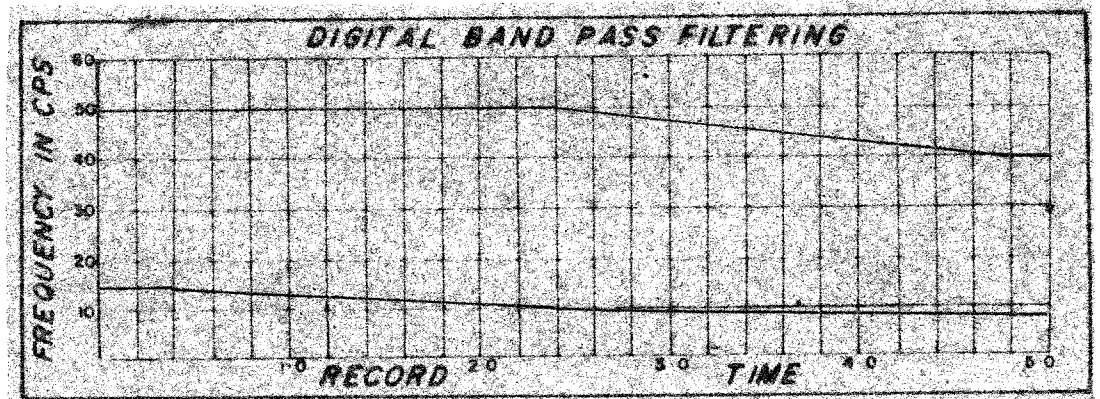

DISPLAY
Analog Filters OUT-OUT
Straight Gain +12 +0 -20 -8
Tapes HTL 1126
HTL

REQ. N° L-4075
Section N° 1052 C
System Code MSTV-2
Assembled by S.A.K.
Checked by

LINE B 442 SP 2099 81 Meters 85 89 93 95 97 98 100 101 103 105 105 Meters 106
LINE B 443 SP 3435=2173 1693 1690 1680 1670 1660 1650 1640 1630 1620 1610 1600 1590 1580 1573

