


**SHOOTING PARAMETERS**  
6-Fold Off End  
Shot by G.S.I. PTY 906  
Cable Length 1600 m  
Group Interval 100 m  
Shot Point Interval 134 m  
Average Shot Offset 156 m  
Charge Size 50 lb  
Average Sers. Depth 13m

**RECORDING PARAMETERS**  
System T1 9000  
Record Length 5 sec  
Sample 2 ms  
GAGC Trip 78s Rate 80 db/s  
Init 43 db Final 100 db  
Filters Hi 7.5 cps 24 db/oct  
Lo 12 cps 24 db/oct  
2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
TAR  
sec 4.0 db/sec  
From 5 sec to 4.0 sec

**DECONVOLUTION**  
Time invariant ARD II  
Filter Length 2.6 sec  
Gate Length 2.6 sec  
No of Gates/Trace 1  
Initial times, Gate No 1 -  
Tr1 1.5 sec, Tr 24.458 sec  
Final times, Gate No 1 -  
Tr1 4.1 sec, Tr 24.3058 sec

**6-FOLD STACK**  
Optimum Wide Band Stack  
RNMO Yes, Diversity Stack Yes  
First Break Suppression  
Tr 0 sec Tr 1.2 sec  
Tr 0.6 sec Tr 1.4 sec  
Tr 1.0 sec Tr 1.6 sec

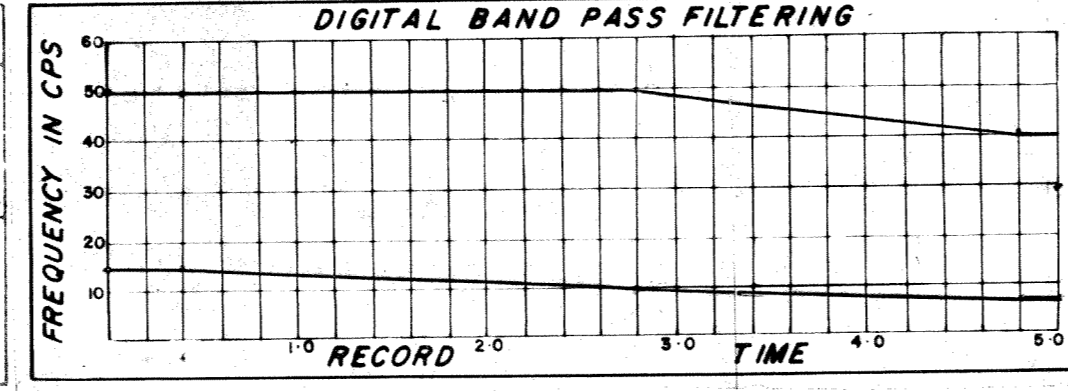

<b>DISPLAY</b>	<b>REQ. N°</b> L-4273
Analog Filters CUT-OUT Straight Gain +12 + 0 -12 + + 0	<b>Section N°</b> 1066C
Tapes HTL 1146 HTL	<b>System Code</b> MSTV-2
	<b>Assembled by</b> K.C.
	<b>Checked by</b> [Signature]

J.N.E.

