


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I. PTY 906
 Cable Length 1600 m
 Sample 2 ms
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 134 m
 Charge Size 50 lb
 Average Sea Depth 15 m

RECORDING PARAMETERS
 System 9000
 Record Length 50
 Sample 2 ms
 GAGC Trip 078 Rate 80db/s
 Int. 43 db Final 100db
 Filters Hi 75 cps 24db/oct
 Lo 8 cps 24db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 ω 4.0 db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1522 m/s
 Replacement Vel 1522 m/s

DECONVOLUTION
 Time invariant ARD I
 Filter Length 252 sec
 Gate Length 2500 sec
 No of Gates/Traces
 Initial times, Gate No 1
 Tr 1: 5 sec, Tr 2: 40-488 sec
 Final times, Gate No 1
 Tr 1: 4 sec, Tr 2: 43-088 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes, Diversity Stack NO
 First Break Suppression
 T₁ 0 sec T₂ 1.0 sec
 T₃ 0.6 sec T₄ 1.2 sec
 T₅ 0.8 sec T₆ 1.4 sec

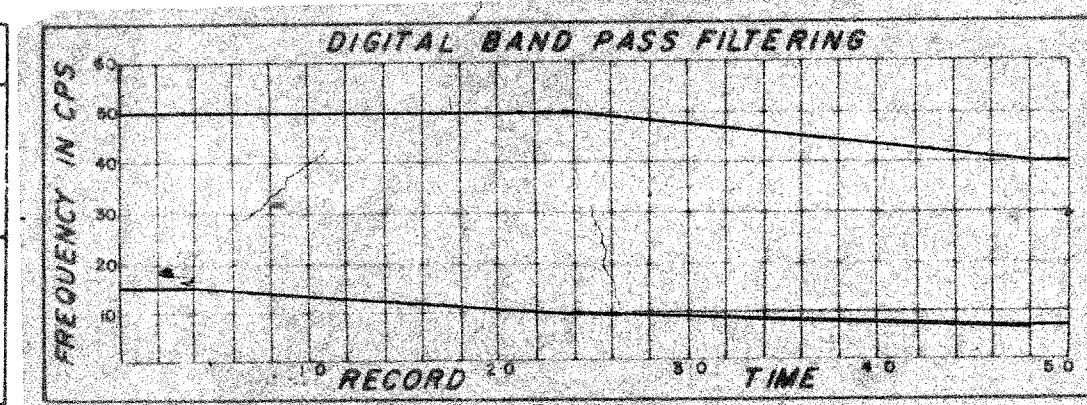

DISPLAY		REQ. N°	L-4071
6 Fold Coverage		Section N°	1065 C
Analog Filters OUT-OUT		System Code	MSTV-2
Straight Gain		Assembled by	W.S.
+12 + 0 -12 = 0		Checked by	W.C.
Tapes HTL 1140			
HTL			

N.E.

LINE B 443
 S.P. 2327

94 Meters 96 99 102 105 107 112 112 117 119 122 123 121

2736 2740 2750 2760 2770 2780 2790 2796 2797 2800 2810 2820 2830 2840 2847 2848 2852

