


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S. PTY 903
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 160m
 Charge Size 50 lb
 Average Seis. Depth 15 m

RECORDING PARAMETERS
 System 10,000
 Record Length 5.0 secs
 Sample 2 ms
 BADC Trip 0.475 Rate 80 db/s
 Int 43 db Final 100 db
 Filters Hi 70 cps 24 db/oct
 Lo 8 cps 24 db/oct
 2ms Anti-Alias Filtering

SEIS EDIT & NMO
 TAR
 $\omega = 4 \text{ L} \text{ db/sec}$
 From 0 sec to 4.0 sec
 Water Velocity 1524 mps
 Replacement Vel 1524 mps

DECONVOLUTION
 Time Varying ARD
 Filter Length 220 msec
 Gate Length 2200 msec
 No of Gates / Trace 2
 Initial Times, Gate No 1
 Tr 1 0 sec, Tr 2 0.46 sec
 Final Times, Gate No 2
 Tr 1 4.5 sec, Tr 2 4.7 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes, Diversity Stack Yes
 First Break Suppression
 T₁ 0 sec T₂ 0.8 sec
 T₃ 0.4 sec T₄ 1.0 sec
 T₅ 0.6 sec T₆ 1.2 sec

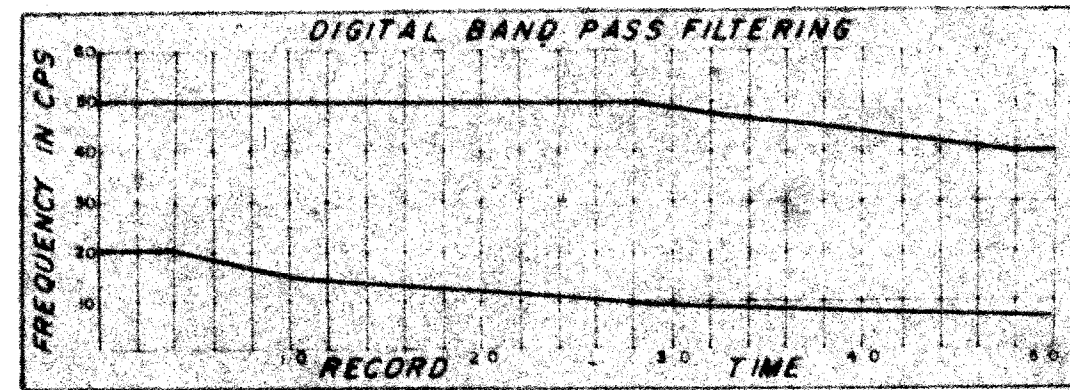

DISPLAY
 Analog Filters OUT-OUT
 Straight Gain
 + 18 + 2 - 22 - - 2
 Tapes HTL 4084
 HTL

REQ N° L-3949
 Section N° 4036C
 System Code MSTV 2
 Assembled by *K.S. Farley*
 Checked by *P.P. O...*

SSE

LINE B 415 S.P. K 7237
 23 Meters 24 24 24 24 24 24 24 24 24 24 24
 K 14095 14100 14110 14120 14130 14140 14150 14160 14170 14180 14190 14200 14210 14224
 LINE B 416 S.P. K 2953
 23 24 Meters 24

