


SHOOTING PARAMETERS
6-Fold Off End
Shot by G.S.I. PTY 903
Cable Length 1600 m
Group Interval 67 m
Shot Point Interval 134 m
Average Shot Offset 160m
Charge Size 33 1/3 lb
Average Seis. Depth 12 m

RECORDING PARAMETERS
System 10,000
Record Length 5.0 secs
Sample 2 ms
GAGC Trip 0.47s Rate 80 db/s
Init. 48 db Final 100 db
Filters Hi 70 cps 24 db/oct
Lo 8 cps 24 db/oct
2ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
ac = 4.0 db/sec
From 0 sec to 4.0 sec
Water Velocity 1524 mps
Replacement Val. 1524 mps

DECONVOLUTION
Time Varying ARD1
Filter Length 220 msec
Gate Length 2200 msec
No of Gates/Trace 2
Initial times, Gate No 1 :-
Tr1: 1.2 sec, Tr 24: 0.46 sec
Final times, Gate No 2 :-
Tr1: 4.5 sec, Tr 24: 3.76 sec

6-FOLD STACK
Optimum Wide Band Stack
RWMO No. Diversity Stack No
First Break Suppression
T₁: 0.0 sec T₂: 0.8 sec
T₃: 0.4 sec T₄: 1.0 sec
T₅: 0.6 sec T₆: 1.2 sec

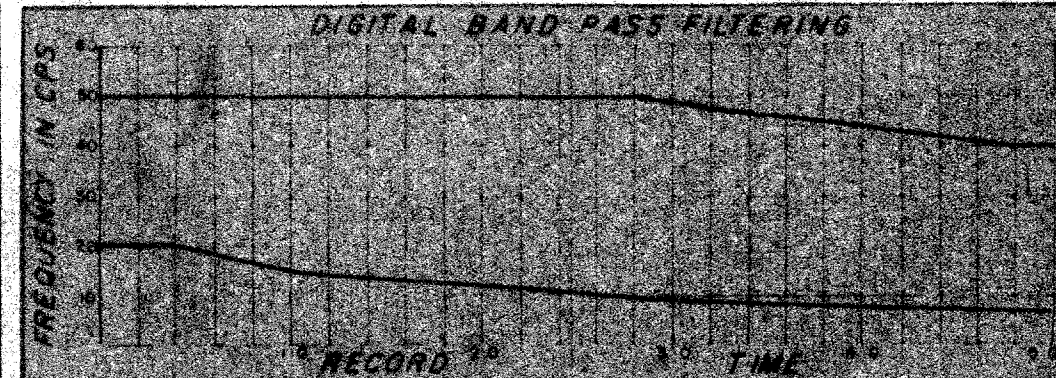

DISPLAY
Analog Filters OUT-OUT
Straight Gain
+16 + 0 -14 = +4
Tapes HTL 4053
HTL

REQ. N° L-3640
Section N° 4-016 C
System Code MSTV-2
Assembled by H. Ribali
Checked by [Signature]
S.E.

LINE B 408
S.P. K 3289

LINE B 409
S.P. K 5385

