


**SHOOTING PARAMETERS**  
6-Fold Off End  
Shot by G.S.I. PTY 903  
Cable Length 1600 m  
Group Interval 67 m  
Shot Point Interval 134 m  
Average Shot Offset 160m  
Charge Size 50 lb  
Average Seis. Depth 10 m

**RECORDING PARAMETERS**  
System 10,000  
Record Length 5.0 secs  
Sample 2 ms  
GAGC Trip 0.47s Rate 80 db/ds  
Int. Fil. dB Final 100 db  
Filters Hi 70 cps 24 db/oct  
Lo 8 cps 24 db/oct  
2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
TAR  
 $\omega = 40$  db/sec  
From 0 sec to 4.0 sec  
Water Velocity 1524 mps  
Replacement Vel 1524 mps

**DECONVOLUTION**  
Time Varying ARD  
Filter Length 2200 msec  
Gate Length 2200 msec  
No of Gates/Trace 2  
Initial times, Gate No 1 :-  
Tr 1 2 sec, Tr 2 4.046 sec  
Final times, Gate No 2 :-  
Tr 1 4.5 sec, Tr 2 3.76 sec

**6-FOLD STACK**  
Optimum Wide Band Stack  
RNMO Yes, Diversity Stack Yes  
First Break Suppression  
T<sub>1</sub> 0 sec T<sub>2</sub> 0.8 sec  
T<sub>3</sub> 0.4 sec T<sub>4</sub> 1.0 sec  
T<sub>5</sub> 0.6 sec T<sub>6</sub> 1.2 sec

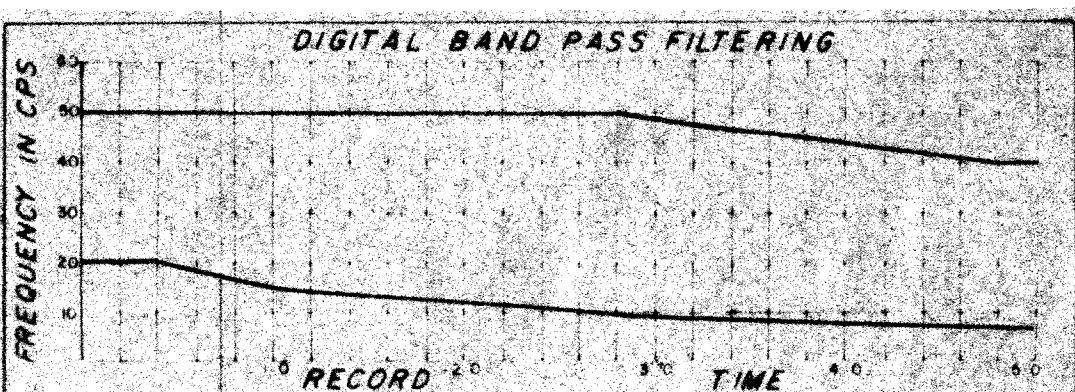

<b>DISPLAY</b>		REQ. N°	L-3887
Analog Filters	OUT-OUT	Section N°	4033C
Straight Gain	+ 0 + 4 - 22 - 18	System Code	MSTV-2
Tapes HTL 4086	HTL	Assembled by	H. R. K. ...
		Checked by	P. ...

