


**SHOOTING PARAMETERS**  
 12-Fold Off End  
 Shot by GSI PTY 906  
 Cable Length 2400 m  
 Group Interval 100 m  
 Shot Point Interval 100 m  
 Average Shot Offset 116 m  
 Charge Size 50 lb  
 Average Seis. Depth 15 m

**RECORDING PARAMETERS**  
 System 9000  
 Record Length 5-0  
 Sample 2ms  
 GAGC Trip 078 Rate 80db/s  
 Init 46 db Final 100db  
 Filters Hi 75 cps 24db/oct  
 Lo 8 cps 24db/oct  
 2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
 TAR  
 sec 4.0 db/sec  
 From 0 sec to 4.0 sec  
 Water Velocity 1522 m/s  
 Replacement Vel 1522 m/s

**DECONVOLUTION**  
 Time variant ARD I  
 Filter Length 220 msec  
 Gate Length 2200 msec  
 No of Gates/Trace, 2  
 Initial times, Gate No 1 :-  
 Tr 1 1.7 sec, Tr 2 4.0-50 sec  
 Final times, Gate No 2 :-  
 Tr 1 5.0 sec, Tr 2 4.3-80 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes, Diversity Stack Yes  
 First Break Suppression  
 T<sub>1</sub> 0 sec T<sub>2</sub> 1.2 sec  
 T<sub>3</sub> 0.6 sec T<sub>4</sub> 1.4 sec  
 T<sub>5</sub> 1.0 sec T<sub>6</sub> 1.6 sec

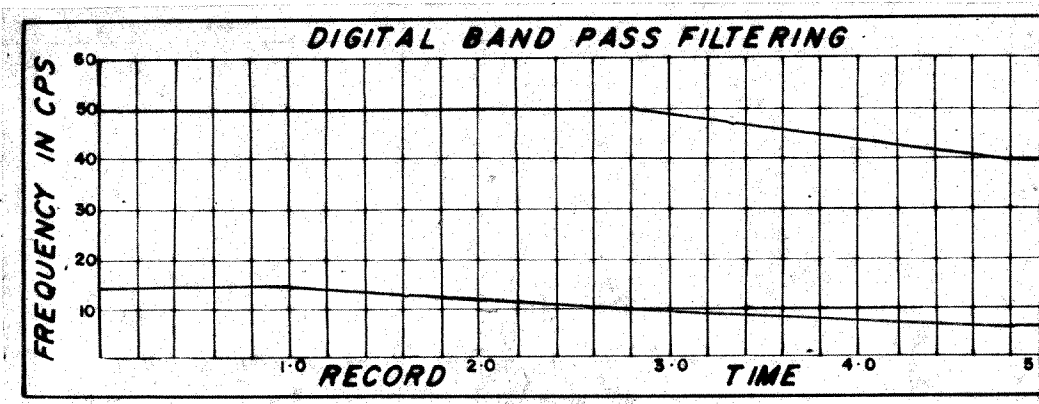

**DISPLAY**  
 Analog Filters OUT-OUT  
 Straight Gain  
 +18 +0 -16 = +2  
 Tape HTL U49

**REQ. N° L-4325**  
**Section N° 1075 C**  
**System Code MSTV-2**  
 Assembled by S  
 Checked by J.S.E.

