


**SHOOTING PARAMETERS**  
6-Fold Off End  
Shot by G.S.I. PTY 905  
Cable Length 1600 m  
Group Interval 6.7 m  
Shot Point Interval 134 m  
Average Shot Offset 160m  
Charge Size 3.3 1/2 lb  
Average Sea Depth 15 m

**RECORDING PARAMETERS**  
System 10,000  
Record Length 5.0  
Sample 2 ms  
GAGC Trip 0.47, Rate 8 db/s  
Int. 48 db/Find 100 db  
Filters Hi. 70 cps 24 db/oct  
Lo 12 cps 12 db/oct  
2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
TAR  
a = 4.0 db/sec  
From 0 sec to 4.0 sec  
Water Velocity 1524 mps  
Replacement Vel. 1524 mps

**DECONVOLUTION**  
Time Varying RD 1  
Filter Length 212 msec  
Gate Length 2200 msec  
No of Gates/Trace 2  
Initial Times, Gate No 1 :-  
T1 1.2 sec, T2 2.4 0.46 sec  
Final Times, Gate No 2 :-  
T1 4.5 sec, T2 3.76 sec

**6-FOLD STACK**  
Optimum Wide Band Stack  
RNMO Yes Diversity Stack No  
First Break Suppression  
T1 0 sec T2 1.0 sec  
T1 0.6 sec T2 1.2 sec  
T1 0.8 sec T2 1.4 sec

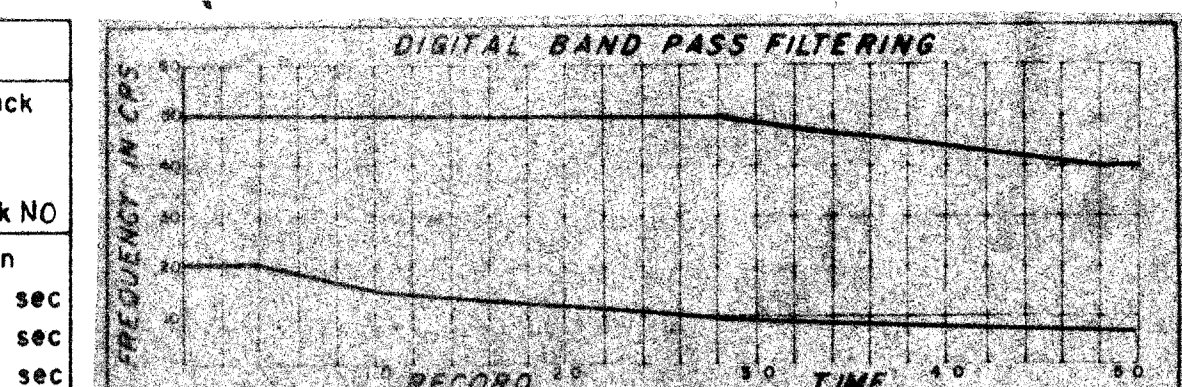

**DISPLAY**  
Analog Filters OUT-OUT  
Stretch Gain 6 + 0 - 20 = 14  
Tape HTL 2 089

**REQ. N°** L- 3674  
**Section N°** 2 021 C  
**System Code** MSTV-2<sub>5</sub>  
Assembled by R. Welch  
Checked by B. Biggs

