


SHOOTING PARAMETERS
 12-Fold Off End
 Shot by G.S. PTY 906
 Cable Length 2400 m
 Group Interval 100 m
 Shot Point Interval 100 m
 Average Shot Offset 200m
 Charge Size 50 lb
 Average Sens. Depth 15 m

RECORDING PARAMETERS
 System 9000
 Record Length 5.0
 Sample 2 ms
 GAGC Trip 0.47s Rate 800b/s
 Init. 36 db Final 100db
 Filters Hi 75 cps 24db/oct
 Lo 8 cps 24db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 4 c db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1522 m/sec
 Replacement Vel 1522 m/sec

DECONVOLUTION
 Time variant ARD
 Filter Length 0.212 sec
 Gate Length 2.2 sec
 No of Gates/Trace 2
 Initial times, Gate No 1 :-
 Tr1 1.7 sec, Tr2 4.0 304 sec
 Final times, Gate No 2 :-
 Tr1 5.0 sec, Tr2 4.3 904 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes Diversity Stack Yes
 First Break Suppression
 T₁ 0 sec T₂ 1.4 sec
 T₃ 0.8 sec T₄ 1.6 sec
 T₅ 1.2 sec T₆ 1.8 sec

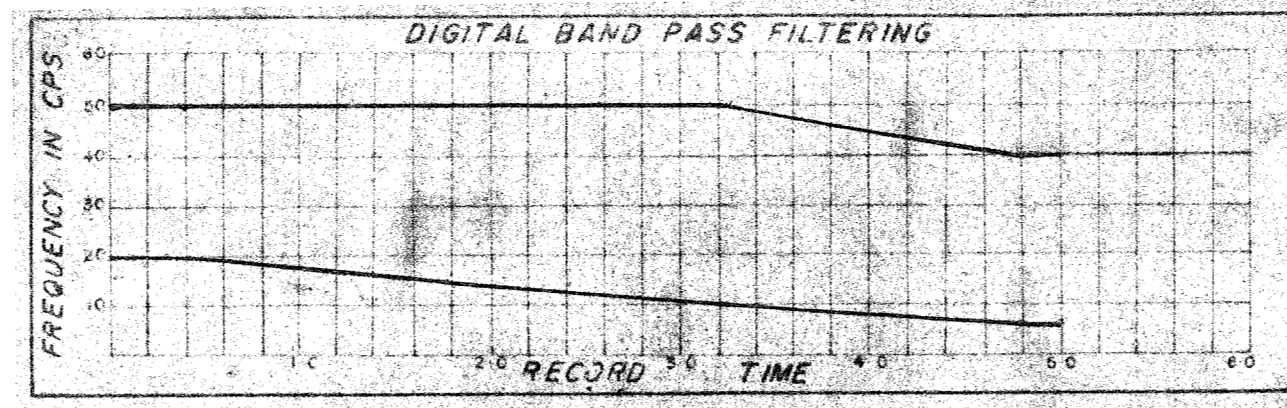

DISPLAY	REQ. N°	L-3488
Single Coverage	Section N°	1015 C
Analog Filters OUT-OUT	System Code	MSTV-2
Straight Gain	Assembled by	M.A.T.G.
+12 + 0 - 4 = +8	Checked by	A.C.
Tapes HTL 1025		
HTL		

