


**SHOOTING PARAMETERS**  
 12-Fold Off End  
 Shot by GSI PTY 90G  
 Cable Length 2400 m  
 Group Interval 10.0 m  
 Shot Point Interval 10.0 m  
 Average Shot Offset 20.0 m  
 Charge Size 50 lb  
 Average Seis. Depth 15 m

**RECORDING PARAMETERS**  
 System 9000  
 Record Length 5.0  
 Sample 2ms  
 SAGC Trip 0.47s Rate 80db/s  
 Int 36 db Final 100db  
 Filters Hi 25cps 12db/oct  
 Lo 8cps 12db/oct  
 2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
 TAR  
 4.0 db/sec  
 From 0 sec to 4.0 sec  
 Water Velocity 1522 m/s  
 Replacement Vel 1522 m/s

**DECONVOLUTION**  
 Time Invariant ARD II  
 Filter Length 0.252 sec  
 Gate Length 2.6 sec  
 N of Gates 7 Trace 1  
 Initial Max Gate No 2  
 Tr 1 7 sec Tr 2 4.0508 sec  
 Final Times Gate No 1 1.0  
 Tr 1 4.3 sec Tr 2 3.108 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes Diversity Stack Yes  
 First Break Suppression  
 T<sub>1</sub> 0.0 sec T<sub>2</sub> 1.6 sec  
 T<sub>3</sub> 1.0 sec T<sub>4</sub> 1.6 sec  
 T<sub>5</sub> 1.2 sec T<sub>6</sub> 1.8 sec

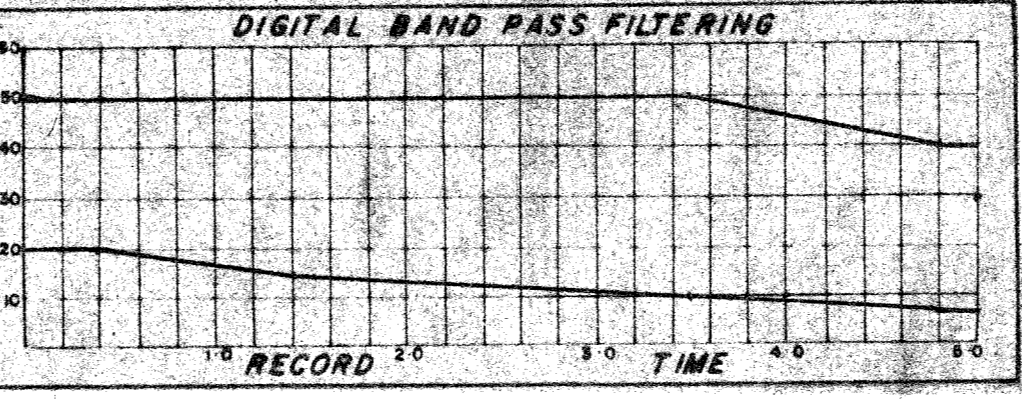

**DISPLAY**  
 Analog Filters OUT-OUT  
 Straight Gain  
 +24+2 -18-18  
 Tapes HTL 1033  
 HTL

**REQ. N°** L-3526  
**Section N°** 1016 C  
**System Code** M.S.  
**Assembled by**  
**Checked by** AC

110 110 Meters 112 115 92 117 117 116 115 115 6560 6560 6540 6526  
 6764 6760 6740 6720 6700 6680 6660 6640 6620 6600 6580 6560 6540 6526

