


SHOOTING PARAMETERS	
6-Fold Off End	
Shot by G.S.I. PTY 903	
Cable Length 1600 m	
Group Interval 67 m	
Shot Point Interval 134 m	
Average Shot Offset 160m	
Charge Size 50 lb	
Average Sea Depth 16 m	

RECORDING PARAMETERS	
System 10,000	
Record Length 5.0 secs	
Sample 2 ms	
GAGC Trip 0.47s Rate 80 db/s	
Net 45 db Final 0.0 db	
Filters Hi 70 cps 24 db/oct	
Lo 8 cps 24 db/oct	
2ms Anti Alias Filtering	

SLIS EDIT & NMO	
TAR	
Water Velocity 1524 mps	
Replacement Vel 1524 mps	

DECONVOLUTION	
Time Varying ARD	
Filter Length 212 msec	
Gate Length 2220 msec	
Nº of Gates / Trace 2	
Initial times, Gate Nº 1 :-	
Tr1 1.2 sec, Tr2 0.46 sec	
Final times, Gate Nº 2 :-	
Tr1 4.5 sec, Tr2 3.75 sec	

6-FOLD STACK	
Optimum Wide Band Stack	
RNMO Yes Diversity Stack No	
First Break Suppression	
T <sub>1</sub> = 0 sec T <sub>2</sub> = 1.2 sec	
T <sub>3</sub> = 0.8 sec T <sub>4</sub> = 1.4 sec	
T <sub>5</sub> = 1.0 sec T <sub>6</sub> = 1.6 sec	

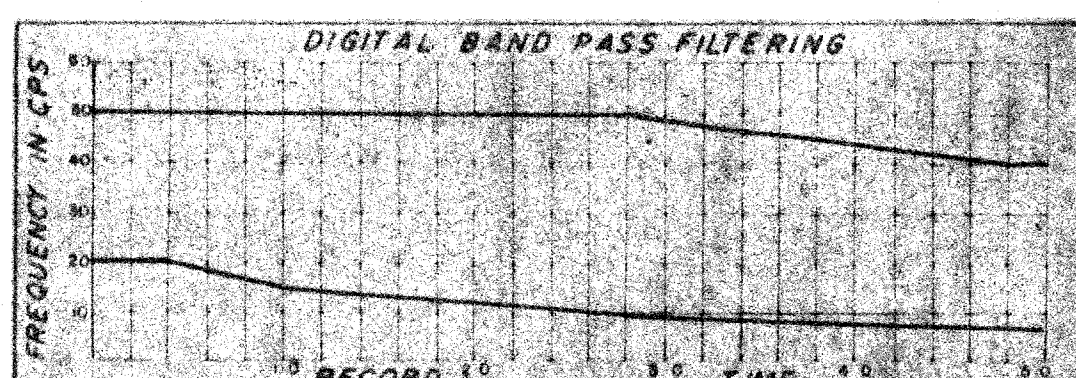

DISPLAY		REQ. Nº	L-3367
Single Coverage		Section Nº	2009-c
Analog Filters OUT-OUT		System Code	MSTV-2
Straight Gain		Assembled by	V.GEADA
+18 + 0 - 6 + 12		Checked by	A. B. G. G.
Tape HTL 2051			

