


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by GS-1 PTY 903
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 124 m
 Average Shot Offset 160 m
 Charge Size 50 lb
 Average Sea Depth 5 m

RECORDING PARAMETERS
 System 10,000
 Record Length 5.0
 Sample 2 ms
 GAGC Trip Off Rate 80 db/s
 Gain 4.5 db/m (10/2 db)
 Filters Hi 70 cps 24 db/oct
 Lo 8 cps 24 db/oct
 2ms Anti-Alias Filtering

SEIS EDIT & NMO
 TAR
 4.0 db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1524 mps
 Replacement Vel 1524 mps

DECONVOLUTION
 Time Varying ARD I
 Filter Length 212 m sec
 Gate Length 2200 m sec
 NP of Gates / Track 2
 Final Times Gate No 1
 Tr1 1.2 sec, Tr 2 4.0 db/sec
 Final Times Gate No 2
 Tr1 4.5 sec, Tr 2 3.76 sec

6-FOLD STACK
 Gohnum Wide Band Stack
 RNMO Yes Diversity Stack NO
 First Break Suppression
 T1=0 sec, T2=10 sec
 T1=0 sec, T2=12 sec
 T1=0.8 sec, T2=1.4 sec

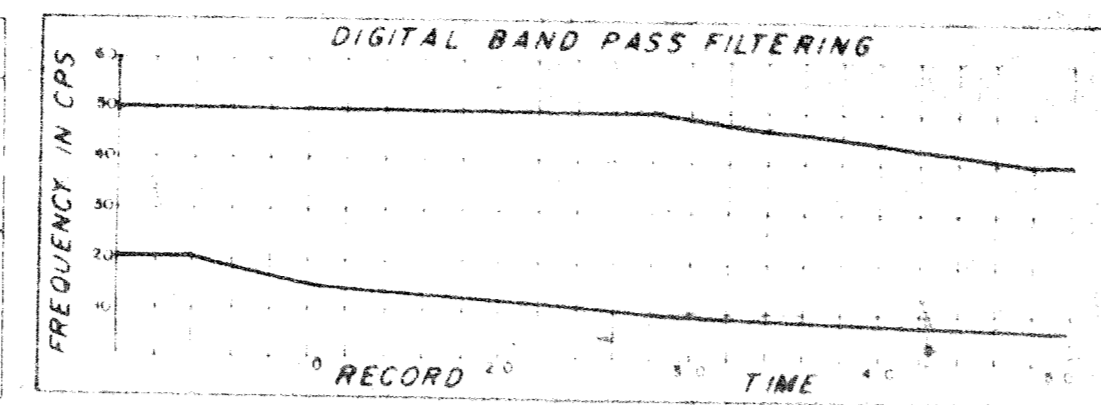

DISPL 47	REQ N°	L-3406
Single Coverage	Section N°	2010-C
Shot Point Interval 124 m	System Code	MSTV 2
Shot Offset 160 m	Assembled by	V. G. A. D. A.
Tapes # 2051	Checked by	

34 WATER DEPTH IN METERS 34
 K1978 970 1960 1950 1940 1930 1915 1910 1900 1890 1880 1870 1860 1850 1840 1830 1820 1815
 LINE B 406
 SP # 4832

