


SHOOTING PARAMETERS
 12-Fold Off End
 Shot by GSI PTY 906
 Cable Length 2400 m
 Group Interval 100 m
 Shot Point Interval 100 m
 Average Shot Offset 200m
 Charge Size 50 lb
 Average Seis. Depth 13 m

RECORDING PARAMETERS
 System 9000
 Record Length 5.0
 Sample 2ms
 GAGC Trip 0.47s Rate 80db/s
 Int 36 db Final 100db
 Filters Hi 75 cps 24db/oct
 Lo 8cps 24db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 4.0 db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1522 mps
 Replacement Vel 1522 mps

DECONVOLUTION
 Time variant ARD I
 Filter Length 2.00 nsec
 Gate Length 250.0 nsec
 No of Gates/Trace 1
 Initial times, Gate No 1 :-
 Tr1 1.7 sec, Tr 24.564 sec
 Final times, Gate No 1 :-
 Tr1 4.3 sec, Tr 24.316 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes, Diversity Stack Yes
 First Break Suppression
 T₁ 0.5 sec T₂ 1.4 sec
 T₃ 0.5 sec T₄ 1.8 sec
 T₅ 1.1 sec T₆ 1.8 sec

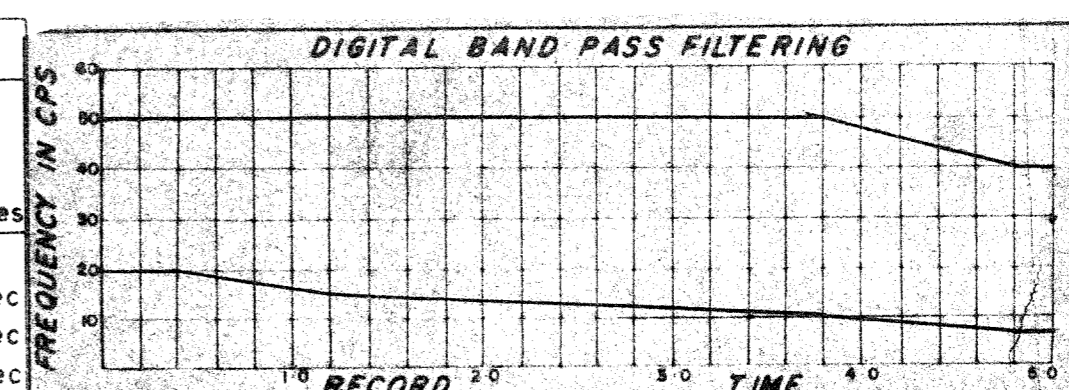

DISPLAY
 Analog Filters OUT-OUT
 Straight Gain +24+0 -18+6
 Tapes HTL 1041
 HTL

REQ. N°	L-3570
Section N°	1019 C
System Code	MSTV-2
Assembled by	SA
Checked by	MC

S. E.

